




## JOINT-LOCK SAND™ PAVER FINISHING SAND

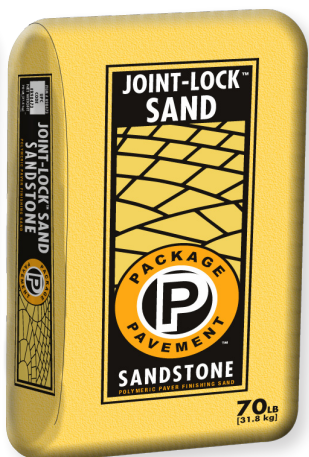

FINISH. SET. GO™

**1. PRODUCT NAME:** JOINT-LOCK PAVER FINISHING SAND

**2. ITEM CODES:**

- 98570 70 LB. JOINT-LOCK SAND BROWNSTONE
- R98473 70 LB. JOINT-LOCK SAND GRAYSTONE
- 98557 70 LB. JOINT-LOCK SAND SANDSTONE

**3. MANUFACTURER:**

Package Pavement Co., Inc.  
 675 Leetown Road, PO Box 408  
 Stormville, NY 12582  
 (800) 724-8193  
 FAX (845) 221-0433  
[www.packagepavement.com](http://www.packagepavement.com)

**4. PRODUCT DESCRIPTION:**

Joint-Lock Sand is a polymer modified paver finishing sand that is specifically designed to complement and enhance any paver installation. Joint-Lock sets hard to resist weed growth, insect mining and erosion. It will resist scouring caused by sweeping, water rinsing and traffic.

Joint-Lock Sand is a uniformly blended mixture of top quality mason-grade sand and a polymeric additive. When activated (by water), the polymer allows Joint-Lock Sand to firm up in the joints between paving stone pavers. It forms a firm barrier - like a one-piece flexible joint. This barrier cannot disappear into the soil, it cannot be blown away, it stays in place between the blocks or bricks. Joint-Lock will help the pavement installation resist movement and prevent water infiltration into the paver base.

It is sold in 70 Lb. (31.7kg) bags / 42 per pallet by nurseries, landscape yards, mason material yards and home centers.

**5. TECHNICAL DATA:**

Complete installation instructions can be found on the Joint-Lock bag. Only use Joint-Lock Sand for joints 1/2" or less. Joint-Lock is not recommended for sloping grades greater than 5%.

**6. INSTALLATION INSTRUCTIONS:**



**1. CLEAN & DRY PAVERS**

Make sure that the surface of the pavers are free of debris and completely dry before applying JOINT-LOCK SAND®. The weather forecast should be rain free for 12 hours after application to ensure optimum bonding and product performance.



**2. POUR SAND & SWEEP**

Pour JOINT-LOCK SAND® evenly over the entire area to be finished. Sweep JOINT-LOCK repeatedly over the joints until they are completely and uniformly filled. For best results fill joints to the full depth of the pavers.



**3. COMPACT SAND**

Use a gas powered plate compactor to compact the sand between the joints of the pavers. This will ensure all voids are filled, repeat steps 2 & 3 as necessary. After compaction sweep off all extra sand. If pavers are coarse, use a leaf blower on lowest setting to clear sand off the paver surface.



**4. REPEATEDLY SATURATE THE AREA**

After you have ensured that the paver surface is *completely* free of sand, lightly but thoroughly saturate the area. (For best results do the saturation in 50-100 sq. ft. stages). The objective is to soak the area as deeply as possible in a controlled manner. Using too much water will float the polymer and sand out of the joints resulting in deposits on the paver surface. Repeat this step 3 times allowing 10 minute intervals between soakings. Make sure the area is free of car and foot traffic for 18-24 hours following the application of JOINT-LOCK SAND®.

**7. CAUTION:**

KEEP UNUSED JOINT LOCK SAND DRY! Do not apply if rain is forecast within 12 hours of the application or the temperatures are expected to go below freezing. If treating an existing walkway, patio, or previously laid pavers, make sure the joints are clean and free of debris, preferably to the base of the paving stone but at least to a depth of 1" below the surface of the pavers.

**8. SAFETY AND HANDLING:**

Always wear dust masks, goggles, and gloves while using Joint-Lock Sand. If the product comes in contact with eyes, rinse them thoroughly with water. KEEP OUT OF REACH OF CHILDREN

**9. WARRANTY:**

Package Pavement warrants this product to be of merchantable quality when used or applied in accordance with the instructions herein. The product is not warranted as suitable for any purpose or use other than the general purpose for which it is intended. Liability under this warranty is LIMITED to the replacement of this product (as purchased) found to be defective or, at the shipping company's option, to a refund of the purchase price. In the event of a claim under this warranty, notice must be given to Package Pavement in writing. This limited warranty is issued and accepted in lieu of all other express warranties and excludes liability for consequential damages.