



PLAN

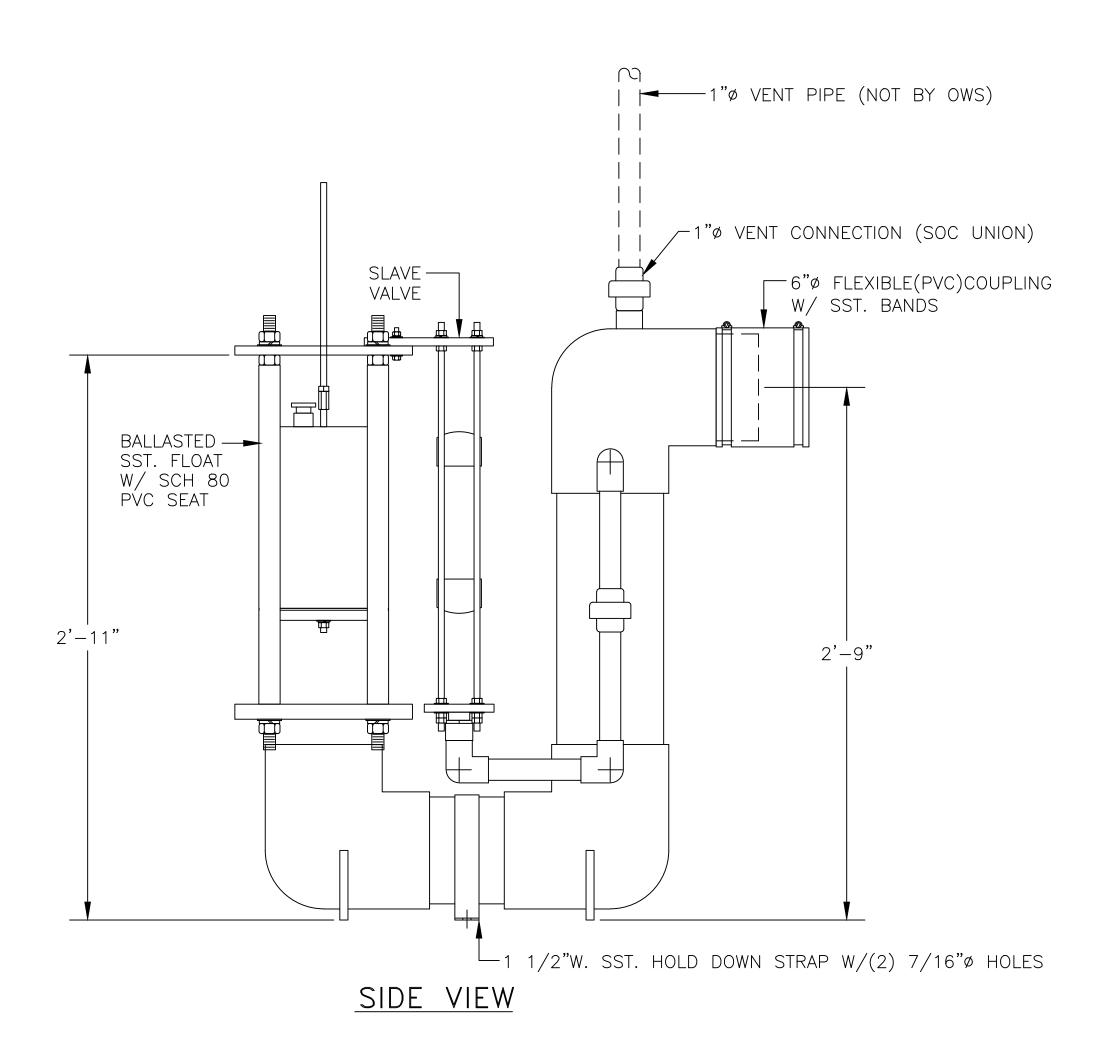

IMPORTANT INFORMATION

COMPLETE STEP BY STEP INSTALLATION INSTRUCTIONS ARE PROVIDED WITH EACH VALVE TO INSURE PROPER OPERATION. SEE BULLETIN# 6.1 READING THE ENTIRE PROCEDURE BEFORE ATTEMPTING INSTALLATION WILL SAVE TIME & MONEY.

- 1. OUTLET PIPE STUB SHIPPED LOOSE.
- 2. FLEXIBLE OUTLET CONNECTION SHIPPED LOOSE.
- 3. HOLD DOWN STRAP IS SHIPPED LOOSE.
- 4. 1"Ø VENT PIPE TO BE SUPPLIED & INSTALLED BY CONTRACTOR. VENT PIPE <u>MUST</u> BE EXTENDED ABOVE MAXIMUM OIL LEVEL OR OUTSIDE OF OIL SUMP. OIL MAY BYPASS STOP VALVE IF VENT IS <u>NOT</u> INSTALLED PROPERLY.
- 5. VALVE VAULT MUST BE PRIMED WITH WATER & FLOAT OPENED PRIOR COMPLETION OF INSTALLATION.
- 6. MANUAL LIFTING CABLE HANDLE IS TO BE MOUNTED NEAR MANHOLE BY CONTRACTOR. DO NOT USE MANUAL LIFTING CABLE IF OIL IS PRESENT.

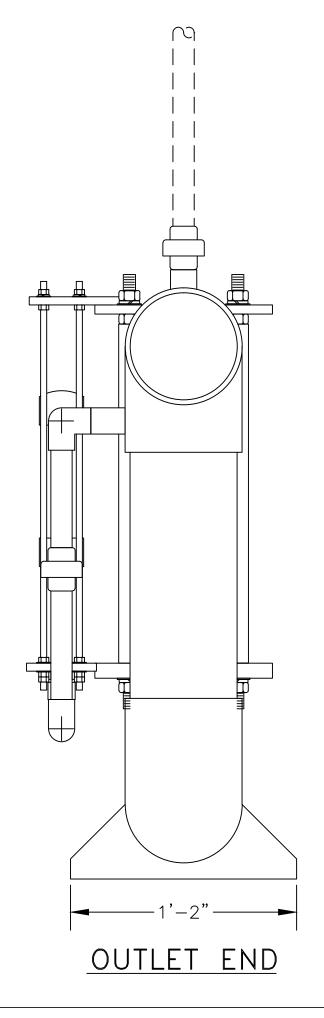

SPECIFICATION IS
OWS TECHNOLOGIES
WEST PALM BEACH,
ALL NOT BE
OT WRITTEN

TMB

THIS DRAWING AND SPECIF
THE PROPERTY OF OWS TE
1109 25TH STREET WEST
FL. 33407 AND SHALL NO'
SPERMISSION

ATE: 6/19/13

33407

OGIES, LLC Street W.P.B., FL

5005

DRAWING No.

3S500:
FILE: OSV-6SV 6/19/13

WS TECHNOLOGIES

0-SWO

MODEL: