

ADDENDUM No. 7 TO CONSTRUCTION CONTRACT DOCUMENTS

BRIDGEPORT PUBLIC UTILITY DISTRICT (BPUD)

Arsenic Removal Project – Construction Contract

May 24, 2017

*THE BIDDER SHALL EXECUTE THE CERTIFICATION WITHIN THE BID FORM
ACKNOWLEDGING RECEIPT OF THIS ADDENDUM.*

DRAWINGS


1. Sheet C7 Pentair pre-filter housings are no longer available. An approved “or equal” is the ISC model 88-30-4F-2B-150-4S-BS-PB-DP.
2. Sheet E3 Note #4 shall be deleted. The Intouch panel system PC was to be used as a local interface to the existing SCADA system. This is no longer applicable or required to integrate with proposed XiO system.

SPECIFICATION SECTION 08361 – ROLLING OVERHEAD DOORS

1. This section shall be revised to require a motorized roll up door and a 20 minute fire rating to match Note 2 on Sheet A1.

CLARIFICATIONS

1. Sheet A1 Note 2 correctly details the roll up door requirements.
2. Sheet E6 Internal Bypass on the VFD is required.

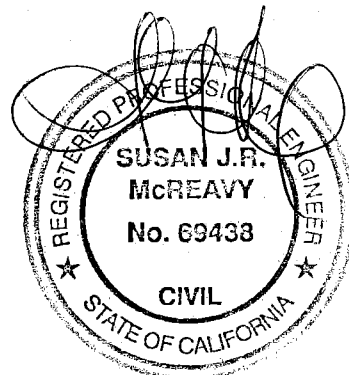

END OF ADDENDUM No. 7

5-24-17

Prepared By:
R.O. ANDERSON ENGINEERING, INC.
1603 Esmeralda Avenue
Minden, NV 89423