



COSMO TIRES®
★ QUALITY TESTED ★



Passenger | Truck and Bus

cosmotires.com

PASSENGER



- Premium comfort ride
- Smooth rolling resistance
- Quiet ride technology
- Greater confidence in wet conditions
- Controlling performance

Features




RC-17


Size	Load Index	Speed Rating	UTQG	Rim Width Measure (inches)	Max Air "PSI"	Max Load Capacity (lbs) Single	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	EU Labeling
185/60R15	84	H	500/A/A	5.5	44	1100	603	189	8	E/B/69dB
185/65R15	88	H	500/A/A	5.5	44	1230	621	189	8	E/B/69dB
195/55R15	85	V	500/A/A	6.0	44	1140	595	201	8	E/B/69dB
195/60R15	88	V	500/A/A	6.0	44	1230	615	201	8	E/B/69dB
195/65R15	91	H	500/A/A	6.0	44	1355	635	201	8	E/B/69dB
205/60R15	91	V	500/A/A	6.0	44	1355	627	209	8	E/B/69dB
205/65R15	94	H	500/A/A	6.0	44	1480	647	209	8	E/B/69dB
215/65R15	100	H	500/A/A	6.5	50	1765	661	221	8	E/B/69dB
185/55R16	83	H	500/A/A	6.0	44	1070	610	194	8	E/B/69dB
195/50R16	84	V	500/A/A	6.0	44	1100	602	201	8	E/B/69dB
195/55R16	87	V	500/A/A	6.0	44	1200	620	201	8	E/B/69dB
205/55R16	91	V	500/A/A	6.5	44	1355	632	214	8	E/B/69dB
205/60R16	92	V	500/A/A	6.0	44	1390	652	209	8	E/B/69dB
205/65R16	95	V	500/A/A	6.0	44	1520	672	209	8	E/B/69dB
215/60R16	95	V	500/A/A	6.5	44	1520	664	221	8	E/B/69dB
225/60R16	98	V	500/A/A	6.5	44	1655	676	228	8	E/B/69dB
215/55R16	93	V	500/A/A	7.0	44	1435	642	226	8	E/B/69dB
215/45ZR17	87	W	500/A/A	7.0	44	1200	626	213	8	E/B/69dB
215/50ZR17	91	W	500/A/A	7.0	44	1355	648	226	8	E/B/69dB
215/55ZR17	94	W	500/A/A	7.0	44	1480	668	226	8	E/B/69dB
225/45ZR17	91	W	500/A/A	7.5	44	1355	634	225	8	E/B/69dB
225/50ZR17	98	W	500/A/A	7.0	50	1655	658	233	8	E/B/69dB
235/45ZR17	97	W	500/A/A	8.0	50	1610	644	236	8	E/B/69dB
245/45ZR17	95	W	500/A/A	8.0	44	1520	652	243	8	E/B/69dB



Handling
Good handling control




Mixed Surface
Suitable for all road surface



Longer Mileage
Designed to last longer



Regional
For long distance travel




Powerful Traction
Powerful traction




Long Haul
For extra long distance travel




Anti-Chipping
Protects against tire-chipping



Urban
For Urban service



Retread
Can be retreaded




OFFROAD
Great off-road traction

	SEGMENT	TYPE	MODEL
	LONG HAUL	<p>Heavy loads and high speeds for extended periods of time, primarily interstate or divided highway.</p> <ul style="list-style-type: none"> • Truckload Carrier 	CT708+ CT566+
	REGIONAL	<p>Medium to heavy loads, frequently on 2-lane roads. Vehicle generally returns to home base at night.</p> <ul style="list-style-type: none"> • Public Utilities • School Bus • Food Distribution • Petroleum Delivery • Courier and Delivery Service • Manufacturing • Auto Carriers 	CT588+ CT512+ CT701+
	ON/OFF ROAD (Mixed Service)	<p>Heavy loads and slower speeds, operating on a mixture of improved secondary and aggressive road surface.</p> <ul style="list-style-type: none"> • Construction and Mining 	CT603+
	OFF ROAD	<p>Very heavy loads normally on poor or unpaved surfaces.</p> <ul style="list-style-type: none"> • Forestry and Logging • Oil Field 	CT601+
	URBAN	<p>Stop and go delivery service within a limited radius metro and suburban.</p> <ul style="list-style-type: none"> • Urban Bus • Sanitation and Refuse 	CT518+

REGIONAL



Recommended Wheel Position



Features



Regional



Longer Mileage



Handling



Retread

CT588+ : Regional For All Wheel Position

Size	Load Index/ Speed Index	PR	TT/TL	Maximum Load (kg/lbs)	Maximum Pressure (kpa/ksi)	Meas. Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
215/75R17.5	126/124L	14	TL	(S) 1700/3750 (D) 1600/3255	690/100	6.00	776	225	12.7
215/75R17.5	135/133J	16	TL	(S) 2180/4805 (D) 2060/4540	850/122	6.00	776	225	12.7
225/70R19.5	121/119L	10	TL	(S) 1450/3195 (D) 1360/3000	550/80	6.75	811	226	12.7
10.00R20	146/143L	16	TT	(S) 3000/6610 (D) 2725/6005	830/120	7.50	1051	274	15.9
11.00R20	150/147K	16	TT	(S) 3350/7390 (D) 3075/6780	830/120	8.00	1095	298	16.0
295/80R22.5	150/147M	16	TL	(S) 3350/7390 (D) 3075/6780	830/120	9.00	1055	290	16.7
295/80R22.5	152/149M	18	TL	(S) 3550/7830 (D) 3250/7160	900/130	9.00	1055	290	16.7
315/80R22.5	154/151M	18	TL	(S) 3750/8270 (D) 3450/7610	830/120	9.00	1083	318	17.5
11R22.5	146/143M	16	TL	(S) 3000/6610 (D) 2725/6005	830/120	8.25	1051	275	16.0

- 5 rib tread design with wide shoulder for excellent handling
- 4 wide straight grooves for efficient water evacuation and breaking performance in wet and dry traction
- Advanced construction and compound design for high-speed and long distance purpose
- Strengthened casing for retreadability



Recommended Wheel Position



Features



Regional



Longer Mileage



Handling



Retread


CT512+ : Regional For All Wheel Position

Size	Load Index/ Speed Index	PR	TT/TL	Maximum Load (kg/lbs)	Maximum Pressure (kpa/ksi)	Meas. Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
7.50R16LT	122/121L	14	TT	(S) 1510/3330 (D) 1450/3195	690/100	6.00	805	203	11.9
8.25R16LT	128/126L	14	TT	(S) 1800/3970 (D) 1700/3750	670/98	6.59	855	224	12.8
9.50R17.5	129/127J	14	TL	(S) 1850/4080 (D) 1750/3860	750/108	6.75	842	236	13.5
9.50R17.5	143/141J	16	TL	(S) 2725/6005 (D) 2575/5675	875/127	6.75	842	236	13.5

- 5 rib tread design with wide shoulder for excellent handling
- Micro-siping for maximum traction at all stages of tire life
- Reinforced casing



Recommended Wheel Position



Features



Regional



Longer Mileage



Handling



Retread

CT701+ : Regional For Drive Wheel Position


Size	Load Index/ Speed Index	PR	TT/TL	Maximum Load (kg/lbs)	Maximum Pressure (kpa/ksi)	Meas. Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
11R22.5	144/142L	14	TL	(S) 2800/6175 (D) 2650/5840	720/105	8.25	1054	279	23.5
11R22.5	146/143L	16	TL	(S) 3000/6610 (D) 2725/6005	830/120	8.25	1054	279	23.5
11R22.5	148/145L	16	TL	(S) 3150/6940 (D) 2900/6395	850/123	8.25	1054	279	23.5
295/80R22.5	150/147L	16	TL	(S) 3350/7390 (D) 3075/6780	830/120	9.00	1052	298	23.5
295/80R22.5	152/149L	18	TL	(S) 3550/7830 (D) 3250/7160	900/130	9.00	1052	298	23.5
315/80R22.5	154/151L	18	TL	(S) 3750/8270 (D) 3450/7610	830/120	9.00	1083	314	23.8
11R24.5	146/143L	14	TL	(S) 3000/6610 (D) 2725/6005	720/105	8.25	1097	275	23.8
11R24.5	149/146L	16	TL	(S) 3250/7160 (D) 3000/6610	830/120	8.25	1097	275	23.8

- Block pattern and open shoulder design for excellent traction and superior resistance to irregular wear
- Block and groove design for excellent grip performance on wet, dry or snowy roads
- Advanced compound and construction for loading performance and increasing durability
- Strengthened casing for retreadability

URBAN



Recommended Wheel Position



Features



Urban



Longer Mileage



Handling



Retread

CT518+ : Urban For All Wheel Position

Size	Load Index/ Speed Index	PR	TT/TL	Maximum Load (kg/lbs)	Maximum Pressure (kpa/ksi)	Meas. Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
11R22.5	144/142L	14	TL	(S) 2800/6175 (D) 2650/5840	720/105	8.25	1052	282	12.7
11R22.5	148/145L	16	TL	(S) 3150/6940 (D) 2900/6395	850/123	8.25	1052	282	12.7
255/70R22.5	140/137L	16	TL	(S) 2500/5510 (D) 2300/5070	830/120	7.50	930	255	12.7
295/75R22.5	144/141L	14	TL	(S) 2800/6175 (D) 2575/5675	760/106	9.00	1014	296	12.7
11R24.5	144/142L	14	TL	(S) 2800/6175 (D) 2650/5840	720/106	8.25	1102	282	12.7
11R24.5	146/143L	14	TL	(S) 3000/6610 (D) 2750/6005	830/120	8.25	1102	282	12.7
285/75R24.5	144/141L	14	TL	(S) 2800/6175 (D) 2575/5675	760/106	8.25	1054	283	12.7


- 5 rib tread design with wide shoulder for excellent handling stability
- 4 wide straight grooves for efficient water evacuation and braking performance in wet and dry traction
- Advanced construction and compound design for high speed and long distance purpose
- Strengthened casing for retreadability



LONG HAUL



Recommended Wheel Position



Features




CT708+ : Long Haul For Drive Wheel Position

Size	Load Index/ Speed Index	PR	TT/TL	Maximum Load (kg/lbs)	Maximum Pressure (kpa/ksi)	Meas. Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
11R22.5	144/142L	14	TL	(S) 2800/6175 (D) 2650/5840	720/105	8.25	1060	284	20.6
11R22.5	146/143L	16	TL	(S) 3000/6610 (D) 2725/6005	830/120	8.25	1060	284	20.6
11R24.5	146/143L	14	TL	(S) 3000/6610 (D) 2725/6005	720/105	8.25	1116	275	20.6
11R24.5	149/146L	16	TL	(S) 3250/7610 (D) 3000/6610	830/120	8.25	1116	275	20.6

- Combination of rib and lug pattern for high traction and superior resistance to irregular wear
- 4 grooves for excellent performance on wet, dry or snowy roads
- Advanced tread design with low heat generation for long distance purpose
- Strengthened casing for retreadability



Recommended Wheel Position



Features



CT566+ : Long Haul For All Wheel Position


Size	Load Index/ Speed Index	PR	TT/TL	Maximum Load (kg/lbs)	Maximum Pressure (kpa/ksi)	Meas. Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
11R22.5	144/142L	14	TL	(S) 2800/6175 (D) 2650/5840	720/105	8.25	1049	275	14.3
11R22.5	146/143L	16	TL	(S) 3000/6610 (D) 2725/6005	830/120	8.25	1054	275	14.3
11R22.5	148/145L	16	TL	(S) 3150/6940 (D) 2900/6395	850/123	8.25	1054	275	14.3
295/75R22.5	144/141L	14	TL	(S) 2800/6175 (D) 2575/5675	760/106	9.00	1014	296	14.3
11R24.5	146/143L	14	TL	(S) 3000/6610 (D) 2725/6005	720/105	8.25	1104	279	14.3

- Combination of rib and lug pattern for high traction and superior resistance to irregular wear
- 4 grooves for excellent performance on wet, dry or snowy roads
- Advanced tread design with low heat generation for long distance purpose
- Strengthened casing for retreadability

ON/OFF ROAD (Mixed Service)



Recommended Wheel Position

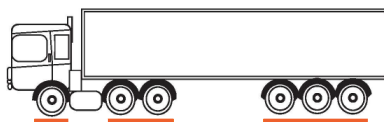

Features



Mixed Surface



Longer Mileage



Power Traction



Retread

CT603+ : On/OFF Road For All Wheel Position


Size	Load Index/ Speed Index	PR	TT/TL	Maximum Load (kg/lbs)	Maximum Pressure (kpa/ksi)	Meas. Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
12.00R20	154/151K	18	TT	(S) 3750/8270 (D) 3450/7610	830/120	8.50	1118	305	18.5
12.00R24	160/157K	20	TT	(S) 4500/9920 (D) 4125/9090	900/131	8.50	1225	310	19.1

- Big block pattern and solid shoulder design for excellent handling stability and superior resistance to irregular wear
- 3 zigzag grooves for excellent grip performance on wet, dry or snowy roads
- Advanced compound with low heat generation for increasing durability
- Strengthened casing for retreadability

OFF ROAD



Recommended Wheel Position



Features



Off Road



Longer Mileage



Anti-Chipping



Powerful Traction



Retread

CT601+ : Off Road For All Wheel Position

Size	Load Index/ Speed Index	PR	TT/TL	Maximum Load (kg/lbs)	Maximum Pressure (kpa/ksi)	Meas. Rim Width (inch)	Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)
7.50R16LT	122/121L	14	TL	(S) 1510/3330 (D) 1450/3195	690/100	6.00	805	203	12.7
9.00R20	141/139K	14	TT	(S) 2575/5675 (D) 2430/5355	790/115	7.00	1028	258	15.0
10.00R20	146/143K	16	TT	(S) 3000/6610 (D) 2725/6005	830/120	7.50	1059	272	15.9
11.00R20	150/147K	16	TT	(S) 3350/7390 (D) 3075/6780	830/120	8.00	1084	291	16.7
11R22.5	144/142L	14	TL	(S) 2800/6175 (D) 2650/5840	720/105	8.25	1060	285	16.6
11R22.5	146/143L	16	TL	(S) 3000/6610 (D) 2725/6005	830/120	8.25	1060	285	16.6

- Combination of rib and lug pattern for high traction and superior resistance to irregular wear
- 3 zigzag grooves for excellent grip performance on wet, dry or snowy roads
- Advanced cut and chip compound for anti-abrasion and resistance to cutting and tearing
- Strengthened casing for retreadability

PASSENGER VEHICLE LIMITED WARRANTY

This Limited Warranty is made by Cosmo Tires and applies to all Cosmo passenger and light truck tires. The original purchaser is entitled to the benefits of this limited warranty unless a warranty exclusion applies or the purchaser has failed to comply with this Limited Warranty's use, maintenance, or tire rotation requirements.

ELIGIBILITY FOR LIMITED WARRANTY COVERAGE

You must be the original purchaser of a warranted tire and the tire must have been continuously installed on the vehicle on which it was first installed. Your sales receipt is your proof of purchase and the vehicle upon which the tire was originally installed. This limited tire warranty is not transferable to another vehicle or to another person. This warranty does not cover tires installed on a commercial vehicle or a vehicle put in commercial use.

LIMITED WARRANTY AGAINST DEFECTS IN WORKMANSHIP AND MATERIALS

All Cosmo tire lines are warranted against failures due to defects in workmanship and materials for the life of the original tread, or five years from the date of purchase (whichever comes first).

If a Cosmo tire fails due to a defect in workmanship or materials, you will be entitled to a prorated allowance applicable to the purchase price of a comparable new Cosmo tire. This replacement tire allowance will be prorated and calculated by dividing the number of 32nds of useable tread remaining when the tire is presented for warranty replacement (rounding to the nearest 32nd of an inch) by the total number of 32nds of an inch of useable tread.

You will be responsible for the charges applicable for mounting, balancing, disposal fees, if applicable, and taxes for the warranty replacement tire when the tire fails due to defects in material or workmanship. Once the useable tread of a Cosmo tire has been exhausted, this warranty for defects in material and workmanship has also been exhausted and the benefits of the Limited Warranty terminate.

WARRANTY EXCLUSIONS AND LIMITATIONS

The exclusions and limitations on the applicability of this warranty set forth in this section and other sections should be read carefully because they may determine whether you are entitled to a warranty replacement or a warranty replacement allowance. The limited warranties for the Cosmo tire you purchased do not apply, if one of the following conditions applies or the tire failed because:

- tires installed on a vehicle registered or normally used outside the United States and Canada
- the tire was installed on a commercial or commercial use vehicle (e.g., limousine)
- the tire was transferred to another vehicle after it was originally installed
- tires installed on a vehicle with a malfunctioning odometer
- the tire is branded as "Blemish" or "NA" or the molded DOT number has been removed or disfigured
- the tire was repaired in a manner that does not comply with Rubber Manufacturers Association standards
- road hazard, potholes, or collision damage, improper mounting or balancing, vandalism, theft, racing, off-road use, long-term improper storage or other abuse
- over and under inflation, overloading, or failure to maintain proper tire pressure
- addition of liquids, solids or gases (other than air, nitrogen, carbon dioxide)
- ozone or weather cracks or checking occurring four (4) years after the date of purchase or, if that proof is not available, four (4) years after the DOT serial date
- vehicle mechanical failures, improper alignment, brake and shock failure, or improperly aligned tires causing "irregular treadwear" (i.e. tread groove

- depth difference of 2/32nds of an inch or more on the same tire) the wheel on which the tire is mounted is defective or fails
- alteration of tread design to improve traction (e.g., siping) or grinding to improve uniformity, or sidewall inlays

Your legal rights vary from state to state. To the extent permitted by the laws of your state, this Limited Warranty does not cover and expressly excludes any coverage for personal injury, property damage, loss of time, inconvenience, loss of use of your vehicle or tire, or any other incidental or consequential damages. No express warranty is given other than those expressly stated in this Limited Warranty booklet. Any implied warranty of merchantability, fitness for a particular purpose or otherwise, is limited in duration and expire when the tire's Useable Tread is exhausted as specified in this limited warranty. No implied warranty of merchantability, fitness for a particular purpose or otherwise, is given on tires used on commercial vehicles or for commercial use vehicles.

OWNER OBLIGATIONS

It is your obligation to present the tire for which you are seeking a warranty replacement or a replacement allowance to a Cosmo tire dealer. Until a tire is accepted by the dealer for warranty replacement or allowance, the tire remains the responsibility of the purchaser. Once the tire is accepted by the dealer for Limited Warranty replacement or allowance, you agree to relinquish all ownership and all rights to the tire.

You should retain the purchase receipt because no warranty claim will be accepted by your Cosmo dealer unless you retain and present the following to the dealer when you seek to the benefits of this limited warranty:

- proof of your purchase of the Cosmo tire presented
- proof of the date of your purchase (if none is presented the date of manufacture will be used for the purposes of this Limited Warranty)
- proof as to the vehicle on which this tire was mounted
- the mileage of the vehicle on which this tire was mounted on the date of purchase
- proof that the tire was properly rotated at the required intervals when a Tread Life Warranty claim is presented

LEGAL RIGHTS

This Limited Warranty gives you legal rights, and you may have additional legal rights under applicable federal statutes and regulations or state law. Your legal rights under state law may vary state to state.

IMPORTANT SAFETY WARNINGS AND INFORMATION

Cosmo tire owners should follow these safety tips to possibly avoid serious accident and injury:

- Tire under inflation, over inflation or overloading can cause tire failure (you must adhere to directions in the manufacturer's owner's manual or tire placard in the vehicle for proper tire pressures for the front and rear tires)
- Be sure that the tire valve caps are all present and securely attached, the valve cap is one of the primary seals against air leaks
- Tires should be mounted by only specially trained dealer personnel
- Match the tire's diameter with the wheel rim's bead seat diameter
- Inflation pressure should be checked, using an accurate tire gauge, at least once a month and check pressure when the tire is cool; never bleed hot tires as it may lead to under inflation after cooling; but never allow children to check, inflate or deflate tires
- Before towing a trailer, check with your dealer to determine proper tire sizing and pressures that may be required because of the trailer load
- Check tires frequently for cuts, bulges, abnormal or uneven wear, abrasions, glass or metal debris and impact damage
- Repairs to tires must always consist of a plug combined with a patch applied to the inside of the tire when the tire is removed from the wheel; plug repairs only are improper and are prone to leaks and sudden failures

- Avoid road hazards, debris, curbs and potholes which can damage your tires, wheels and alignment
- Never over inflate your tire and never exceed the maximum pressure and load molded in the tire sidewall and only inflate tire to maximum pressure when your tires are carrying the maximum load
- Have tire punctures repaired by the trained personnel at a Cosmo dealer
- If your vehicle is stuck in snow, mud, sand or is impeded by a physical obstruction, such as a ditch, avoid excessive tire spinning; never exceed 35 miles an hour on the odometer when spinning a tire as the centrifugal force generated above that speed could result in tire deformation or explosion. Instead, use gentle forward and backward motion to free the vehicle
- Best tire performance is achieved when all tires are of the same type and the size that is recommended by the vehicle manufacturer for the particular axle. Never mount radial ply tires on the same axle as nonradial ply tires; never mount radial tires on the front axle when non-radial tires are mounted on the rear axle as these conditions can create vehicle instability resulting in sudden loss of control, damage and injury
- It is recommended that all four (4) tires on a passenger or light truck vehicle be replaced at the same time. However, when only two (2) tires are replaced, the new tires should be installed on the rear axle to achieve better driving performance and safety
- Never drive on tires that have less than 2/32nds of an inch of tread remaining; replace tires as soon as the tread reaches the treadwear indicators molded into the tread grooves of the tire which reveal when the tread depth remaining is 2/32nds of an inch. Continued use creates a serious risk of tire failure, loss of control and serious injury
- Never operate your vehicle at speeds above that posted or speeds that are not justified by the road conditions

TRUCK/BUS LIMITED WARRANTY

This warranty is in effect for the original purchaser only. All tires covered by this warranty must have a DOT serial number. The Claim Procedures, Exclusions and Limitations sections of this warranty should be read carefully. They provide limitations on the applicability of this warranty and set forth the procedures you must comply with in order to obtain the credits on new purchases offered by this limited warranty.

If a tire becomes unserviceable due to a workmanship related condition within 2/32" of the original usable tread being worn, the tire will be replaced with a comparable new Cosmo tire free of charge. Original, usable tread is defined as the original tread down to the level of the tread wear indicators (2/32" tread remaining), at which time the tire is considered to be worn out.

When more than 2/32" of the original usable tread has been worn, the user must pay for the cost of a replacement tire based on the amount of tread used. This is calculated by dividing the number of 32nds by the original usable tread depth and multiplying by the current dealer selling price. The cost of mounting and balancing and applicable taxes must be paid by the user.

CLAIM PROCEDURE

Each of the following procedures must be complied with in order to qualify for any credit provided by this warranty:

1. Present the unserviceable tire, together with any tube and flap used with that tire, to an authorized Cosmo distributor.
2. Complete and sign an Cosmo Tires Claim Form to be provided by that

distributor.

3. Present to that distributor any evidence that may be necessary to establish entitlement to the warranty (e.g., proof that claimant was the first purchaser for use of the tire).
4. Pay the price of the new tire, including any federal and local taxes and any distributor mounting, balancing or other charges, less Cosmo Tires' credit.

EXCLUSIONS

This limited warranty does not apply to unserviceable conditions due to:

- Road Hazards
- Fire
- Improper Inflation
- Misapplication
- Collision / Wreck
- Improper repair or retreading
- Willful Abuse
- Wheel Imbalance
- Ozone or weather cracks during the original tread life after 3 years from date of manufacture
- Theft or Vandalism
- Racing or off-road use
- Mechanical Defects (such as brakes, shocks or rims)
- Ride complaints after first 2/32" of tread wear
- Misalignment
- Overloading
- Tires that have the original tread design modified

NOR DOES THIS LIMITED WARRANTY APPLY TO ANY TIRES:

- Marked "Blemish" or "NA" (No Adjustment).
- With the serial number cut or buffed.
- Purchased or used outside of the United States or Canada
- With less than 2/32" remaining tread.
- Retreaded with less than 2/32" of tread remaining.

LIMITATIONS


A cash refund will not be given in lieu of the credits provided for unless Cosmo Tire in its sole discretion so elects. No Cosmo distributor or representative has the authority to make any commitment, promise, addition or modification to the terms of this express warranty.

All implied warranties, with respect to Cosmo Tire, either of merchantability or otherwise, are to the maximum extent permitted by applicable law, disclaimed entirely or, if not so disclaim able, limited in duration to the period of this express limited warranty.

Cosmo Tires shall not be responsible for (1) any commercial loss, (2) any damage to or loss of property other than the tire itself, or (3) any other incidental damages permitted by law, arising from any defect in any Cosmo Tire.

Some states do not allow limitation on how long an implied warranty lasts, or the exclusions of incidental damages, so the above limitations may not apply to you. This warranty gives you specific legal rights and you may also have other rights which vary from state to state. If it should be determined that the remedies set forth in this limited warranty fail of their essential purpose, the buyer's remedies against Cosmo for any breach of warranty shall be limited to a return of the unserviceable tire to Cosmo, reduced by the depreciation of such tire.

The warranty coverage during an Cosmo Brand tire's original tread life expires when either the tread wear indicators show (2/32") or 3 years from the original date of manufacture.

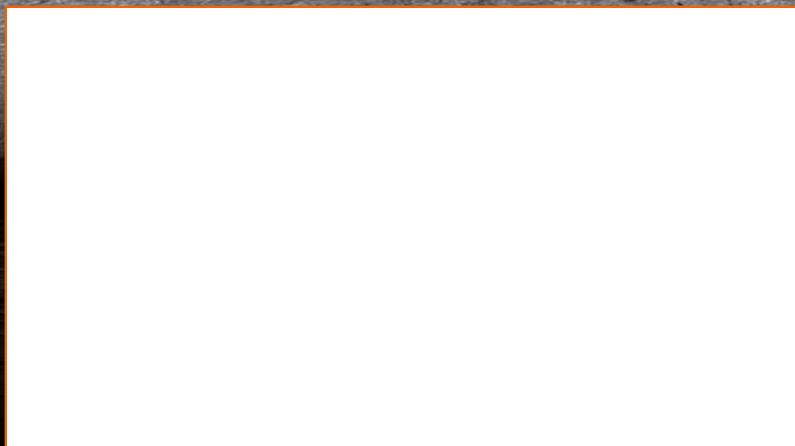

cosmotires.com