

### ASSEMBLY LIST


- ① 6"Ø INLET, FLANGED
- ② 6"Ø OUTLET, FLANGED
- ③ 4"Ø FPT DUPLEX SERVICE FITTING
- ④ 2'-6"Ø MANWAY W/ (2) FPT FITTINGS
- ⑤ COALESCING MEDIA
- ⑥ SLUDGE BAFFLE
- ⑦ 4"Ø FPT MONITOR FITTING OR OPTIONAL HYDROSTATIC RESERVOIR (DW ONLY)
- ⑧ LIFTING LUGS
- ⑨ OPTIONAL PREFABRICATED DEADMAN

THIS DRAWING AND SPECIFICATION IS THE PROPERTY OF OWS TECHNOLOGIES, 1109 25TH STREET WEST PALM BEACH, FL. 33407 AND SHALL NOT BE REPRODUCED WITHOUT WRITTEN PERMISSION.

SCALE: N.T.S.  
DATE: 12/23/14

DRAWN BY: TMB  
CHECKED BY:

**OIL WATER SEPARATOR TECHNOLOGIES LLC**  
1109 25TH STREET W.P.B., FL. 33407

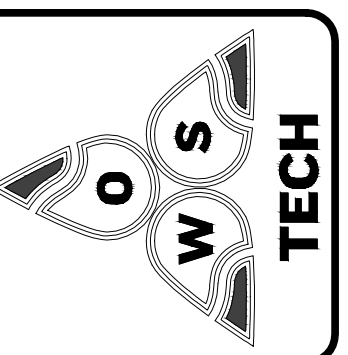

OWS JOB No. -  
DRAWING No. 4S5112  
FILE: 10-15K-114-SWDW 12/23/14

MODEL: HB-F-10-15K-1 114 G.P.M.  
JOB: OWS TECHNOLOGIES

### WEIGHTS & CAPACITIES

10'Ø - 15,000 GAL. TANK SW OR DW  
NOMINAL WGT. SW 7,800#  
NOMINAL WGT. DW 9,000#  
MAX. SPILL CAPACITY 9,000 GAL.