

ASSEMBLY LIST

- ① 14"Ø INLET, FLANGED
- ② 14"Ø OUTLET, FLANGED
- ③ 4"Ø FPT DUPLEX SERVICE FITTING
- ④ 2'-6"Ø MANWAY W/ (2) FPT FITTINGS
- ⑤ COALESCING MEDIA
- ⑥ SLUDGE BAFFLE
- ⑦ 4"Ø FPT MONITOR FITTING OR OPTIONAL HYDROSTATIC RESERVOIR (DW ONLY)
- ⑧ LIFTING LUGS
- ⑨ OPTIONAL PREFABRICATED DEADMAN

SCALE: N.T.S.


DATE: 12/22/14

THIS DRAWING AND SPECIFICATION IS THE PROPERTY OF OWS TECHNOLOGIES, 1109 25TH STREET WEST PALM BEACH, FL. 33407 AND SHALL NOT BE REPRODUCED WITHOUT WRITTEN PERMISSION.

DRAWN BY: TMB

CHECKED BY:

OIL WATER SEPARATOR
TECHNOLOGIES, LLC
 1109 25TH STREET W.P.B., FL. 33407

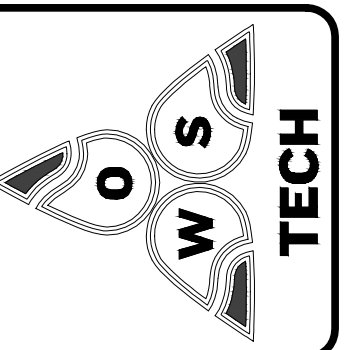

OWS JOB No.

-

DRAWING No.

4S5103

JOB:

OWS TECHNOLOGIES

MODEL: HB-F-10-15K-10 1,140 G.P.M.

FILE: 10-15K-1140-SWDW 12/22/14

WEIGHTS & CAPACITIES

10'Ø - 15,000 GAL. TANK SW OR DW
 NOMINAL WGT. SW 7,800#
 NOMINAL WGT. DW 9,000#
 MAX. SPILL CAPACITY 9,000 GAL.