


ASSEMBLY LIST

- 1 8"Ø INLET, FLANGED
- 2 8"Ø OUTLET, FLANGED
- 3 4"Ø FPT DUPLEX SERVICE FITTING
- 4 2'-6"Ø MANWAY W/ (2) FPT FITTINGS
- 5 COALESCING MEDIA
- 6 SLUDGE BAFFLE
- 7 4"Ø FPT MONITOR FITTING OR OPTIONAL HYDROSTATIC RESERVOIR (DW ONLY)
- 8 LIFTING LUGS
- 9 OPTIONAL PREFABRICATED DEADMAN

THIS DRAWING AND SPECIFICATION IS THE PROPERTY OF OWS TECHNOLOGIES, 1109 25TH STREET WEST PALM BEACH, FL. 33407 AND SHALL NOT BE REPRODUCED WITHOUT WRITTEN PERMISSION.

SCALE: N.T.S.
DATE: 12/23/14

OIL WATER SEPARATOR TECHNOLOGIES LLC
1109 25TH STREET W.P.B., FL. 33407

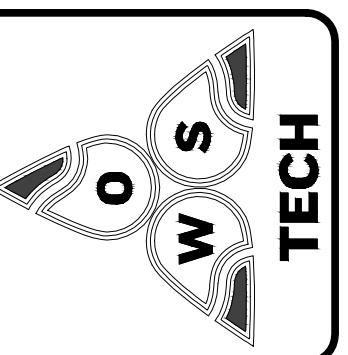

OWS JOB No. -
DRAWING No. 4S5111
FILE: 10-15K-228-SWDW 12/23/14

MODEL: HB-F-10-15K-2 228 G.P.M.
JOB: OWS TECHNOLOGIES

DRAWN BY: TMB
CHECKED BY:

WEIGHTS & CAPACITIES

10'Ø - 15,000 GAL. TANK SW OR DW
NOMINAL WGT. SW 7,800#
NOMINAL WGT. DW 9,000#
MAX. SPILL CAPACITY 9,000 GAL.