


## ASSEMBLY LIST

- 1 8"Ø INLET, FLANGED
- 2 8"Ø OUTLET, FLANGED
- 3 4"Ø FPT DUPLEX SERVICE FITTING
- 4 2'-6"Ø MANWAY W/ (2) FPT FITTINGS
- 5 COALESCING MEDIA
- 6 SLUDGE BAFFLE
- 7 4"Ø FPT MONITOR FITTING OR OPTIONAL HYDROSTATIC RESERVOIR (DW ONLY)
- 8 LIFTING LUGS
- 9 OPTIONAL PREFABRICATED DEADMAN

SCALE: N.T.S. DATE: 12/30/14  
 DRAWN BY: TMB CHECKED BY:

THIS DRAWING AND SPECIFICATION IS THE PROPERTY OF OWS TECHNOLOGIES, 1109 25TH STREET WEST PALM BEACH, FL. 33407 AND SHALL NOT BE REPRODUCED WITHOUT WRITTEN PERMISSION.

**OIL WATER SEPARATOR TECHNOLOGIES LLC**  
 1109 25TH STREET W.P.B., FL. 33407

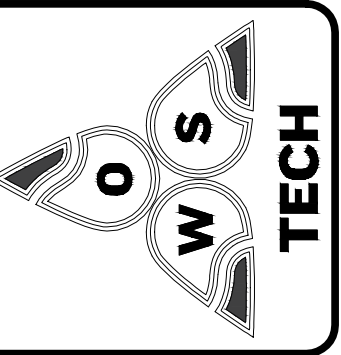

OWS JOB No. -

MODEL: HB-F-10-25K-2 228 G.P.M.

DRAWING No. 4S5152  
 FILE: 10-25K-228-SMDW 12/30/14

JOB: OWS TECHNOLOGIES

## WEIGHTS & CAPACITIES

10'Ø - 25,000 GAL. TANK SW OR DW  
 NOMINAL WGT. SW 15,000#  
 NOMINAL WGT. DW 17,700#  
 MAX. SPILL CAPACITY 15,000 GAL.