


### DESCRIPTION

Target Cell Chemistry	NMCs, NCA/ Gr, Gr+Si
Additive Function	Low resistance Excellent high temperature capacity retention & recovery
Target Product	Li-ion cells for E-mobility, ESS, UAVs
Application	High temperature storage, low gassing, high capacity retention Supplement/replacement for LiPO2F2, LiDFP2

### ADDITIVE SPECIFICATIONS

Additive Purity	≥ 99.9%
Impurities	H <sub>2</sub> O < 50 ppm, HF < 20 ppm
Recommended Use Range	0.5 to 5%
Handling and Use	Handle in dry room or glovebox. Do not expose to moisture or air
SDS	Provided with product
Packaging/Labeling	Complies with local shipping regulations
Availability	Product available upon request. Lead time is 2 to 4 weeks

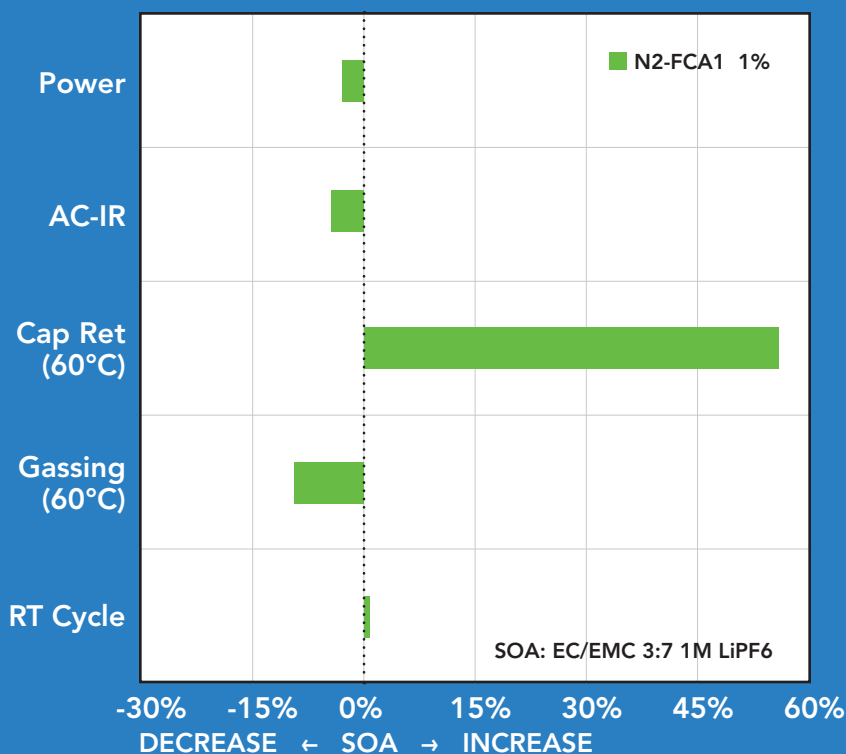

### TESTING PARAMETERS

**Power:** 10 sec. 1C pulse discharge at 50% SOC

**AC-IR:** 1 kHz at 50% SOC

**High Temperature Storage:** Four weeks at 60°C, 100% SOC. Capacity retention is the ratio of 0.3C charge before storage to 0.3C discharge after. Gassing was measured as the change in thickness at the center of the cell.

**Cycle Life:** 25°C, 1C/1C cycling (CV cut-off C/10)

**Cell Configuration:** 1.6 Ah capacity; stacked plate pouch cell, NMC811 – artificial graphite, 2.7 to 4.2V.

- Cathode loading: 28.98 mg/cm<sup>2</sup>
- Anode loading: 19.22 mg/cm<sup>2</sup>
- Estimated energy density: 451 Wh/L
- Estimated specific energy: 235 Wh/kg

Case study data examples are available upon request.

For further application information and product details, please email [info@nohms.com](mailto:info@nohms.com).