

Cooperative Intersection Collision Avoidance System Limited to Stop Sign and Traffic Signal Violations (CICAS-V)

High-Level Requirements Specification

Final Phase I Release v4.01

(Appendix C-1)

August 29, 2008



Crash Avoidance Metrics Partnership (CAMP) Produced
In conjunction with Virginia Tech Transportation Institute for
ITS Joint Program Office
Research and Innovative Technology Administration
U.S. Department of Transportation

CAMP Members:

Mercedes-Benz
General Motors (GM)
Toyota
Honda
Ford

Notice

This document is disseminated under the sponsorship of the U.S. Department of Transportation in the interest of information exchange. The U.S. Government assumes no liability for the use of the information contained in this document. This report does not constitute a standard, specification, or regulation.

The U.S. Government does not endorse products or manufacturers. Trademarks or manufacturers' names appear in this report only because they are considered essential to the objective of the document.

TECHNICAL REPORT DOCUMENTATION PAGE

1. Report No.	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle Cooperative Intersection Collision Avoidance System Limited to Stop Sign and Traffic Signal Violations (CICAS-V) High-Level Requirements Specification		5. Report Date August 29, 2008	
		6. Performing Organization Code:	
7. Author(s) Michael Maile, PI, Farid Ahmed-Zaid, Lorenzo Caminiti, John Lundberg, Priyantha Mudalige, Chuck Pall		8. Performing Organization Report No.	
9. Performing Organization Name and Address Virginia Tech Transportation Institute 3500 Transportation Research Plaza (0536) Blacksburg, VA 24061 <i>In conjunction with:</i> Crash Avoidance Metrics Partnership on behalf of the Vehicle Safety Communications 2 Consortium 39255 Country Club Drive Suite B-40 Farmington Hills, MI 48331		10. Work Unit No.	
		11. Contract or Grant No. DTFH61-01-X-00014	
12. Sponsoring Agency Name and Address United States Department of Transportation, Federal Highway Administration 1200 New Jersey Ave, S.E. Washington, DC 20590		13. Type of Report and Period Covered High-Level System Requirements	
		14. Sponsoring Agency Code	
15. Supplementary Notes Contributing Authors: J. Kyle Garrett, June L. Kaiser, Lee T. Mixon, Gary D. Smith			
16. Abstract The Cooperative Intersection Collision Avoidance Systems for Violations (CICAS-V) project aims to develop and field-test a comprehensive system to reduce the number and severity of crashes at intersections due to violations of traffic signals and stop signs. The document is intended to identify and describe the high-level requirements of CICAS-V. High-level requirements define the specific behavior of a system, that is, they provide a description of what the system is intended to do.			
17. Key Words CICAS, CICAS-V, crash reduction, collision avoidance, intersections		18. Distribution Statement No restrictions. This document is available to the public through the National Technical Information Service, Springfield, VA 22161.	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 74	22. Price

Photos Credits

Photos and Illustration's courtesy of CAMP

Revision History

Revision	Description	Incorporated	
		Date	Doc ID
01.00	Initial Release	11/28/06	HRS v1.00
01.01	Draft Preliminary Internal Release	7/16/07	HRS v1.01
01.02	Draft Preliminary for General Review	8/3/07	HRS v1.02
01.03	Preliminary Release	8/17/07	HRS v1.03
01.04	Draft Interim Release	11/30/07	HRS v1.04
02.01	Final Interim Release	2/29/08	HRS v2.01
03.00	Draft Final Release	08/08	HRS v3.00
04.00	Final Phase I Release	08/29/08	HRS v4.00
04.01	Addressed first round of USDOT comments	04/07/09	HRS v4.01

Table of Contents

1	Introduction	1
1.1	System Purpose	1
1.2	System Scope	3
1.3	Definitions, Acronyms, and Abbreviations.....	3
1.4	References	3
1.5	System Overview.....	5
2	General System Description	6
2.1	System Context.....	6
2.2	System Modes and States	7
2.3	Major System Capabilities	9
2.3.1	Infrastructure Component Capabilities	9
2.3.2	Vehicle Component Operation.....	11
2.4	Major System Conditions	14
2.5	Major System Constraints	14
2.6	User Characteristics.....	15
2.6.1	Automobile OEMs	15
2.6.2	State and Local DOTs	15
2.6.3	USDOT.....	16
2.6.4	Vehicle Drivers.....	16
2.6.5	Traffic Control Equipment Manufacturers	17
2.6.6	VII Network Operating Entity	17
2.6.7	Organization Responsible for CICAS-V Guidelines and Standards	18
2.7	Assumptions and Dependencies	18
2.8	Operational Scenarios	19
2.8.1	StartUp and Intersection Validation Scenarios.....	20
2.8.2	Normal Operating Scenarios	22
2.8.3	System Failure Mode Scenarios.....	25
2.8.4	Diagnostics Scenarios.....	27

3	System Capabilities, Conditions and Constraints.....	28
3.1	Functional Capabilities	30
3.1.1	FO – OBE Functional Requirements	30
3.1.2	FR – RSE Functional Requirements.....	35
3.2	Physical Requirements.....	40
3.2.1	HO – OBE Hardware Physical Requirements	40
3.2.2	HR – RSE Hardware Physical Requirements.....	41
3.3	System Performance Characteristics.....	42
3.3.1	PO – OBE Performance Requirements.....	42
3.3.2	PR – RSE Performance Requirements	42
3.4	System Security.....	44
3.4.1	SO – OBE Security Requirements	44
3.4.2	SR – RSE Security Requirements.....	44
3.5	Information Management	45
3.5.1	DO – OBE Data Requirements	45
3.5.2	DR – RSE Data Requirements	46
3.6	System Operations – Quality, Training, and Documentation Requirements.....	48
3.6.1	QO – OBE Quality Requirements.....	48
3.6.2	QR – RSE Quality Requirements	48
3.6.3	TO – OBE Training and Documentation Requirements.....	48
3.6.4	TR – RSE Training and Documentation Requirements	48
3.7	External Requirements.....	50
3.7.1	XO – OBE External Requirements	50
3.7.2	XR – RSE External Requirements	50
3.7.3	XS – External Requirements on CICAS-V System Maintenance Vehicles	52
3.7.4	CO – Constraints on the OBE Components Design.....	52
3.7.5	CR – Constraints on the RSE Components Design	54
3.7.6	CS – Constraints on the CICAS-V System Design.....	54
3.8	System Lifecycle.....	55
3.8.1	LO – OBE Lifecycle Requirements.....	55

3.8.2 LR – RSE Lifecycle Requirements	55
3.9 System Interfaces.....	56
3.9.1 IO – OBE Interface Requirements.....	56
3.9.2 IR – RSE Interface Requirements	57
Appendix A: List of Acronyms	61
Appendix B: Glossary of Terms	62

List of Figures

Figure 1 - Basic Concept of the CICAS-V System at a Signalized Intersection	2
Figure 2 - CICAS-V Functional Schematic (Normal Operating Mode)	5
Figure 3 - CICAS-V Logical System Boundaries	6
Figure 4 - CICAS-V Mode-State-Behavior Diagram	8
Figure 5 - Vehicle Entering a Dedicated Left Turn Lane.....	24
Figure 6 - CICAS-V Functional Schematic (Maintenance Mode).....	38

List of Tables

Table 1 - Summary of Action Sequences at CICAS-V Intersections	12
Table 2 - CICAS-V Scenarios	20
Table 3 - Explanation of the Requirements.....	29
Table 4 - Requirement ID Format.....	29

1 Introduction

The purpose of this document is to provide a set of high-level requirements for the Cooperative Intersection Collision Avoidance System (CICAS) for Violations (CICAS-V), a system that involves both infrastructure and in-vehicle elements, working together, to reduce the number of violation-related crashes at controlled intersections within the United States.

The document is intended to identify and describe the high-level requirements of CICAS-V. High-level requirements define the specific behavior of a system, that is, they provide a description of what the system is intended to do. High-level requirements do not address how the behavior should be accomplished or implemented.

Section 2 of the document will provide a general description of the system and scenarios demonstrating the desired functionality of the system under various modes of operation.

Section 3 of the document will provide a set of high-level requirements for the components of the system.

1.1 System Purpose

CICAS-V is intended to reduce intersection crashes due to violations of traffic signals and stops signs. There are about 9,500 fatalities in intersection area crashes in the U.S. every year with an impact of approximately \$97 Billion. Out of those totals, CICAS-V has the potential to address intersection crossing path crashes that entail about 2,700 fatalities with an impact of \$19 Billion.¹

This is done by issuing a warning to the driver while there is still time to stop the vehicle in a controlled manner and prevent the violation. When a vehicle is approaching a controlled intersection in a manner that indicates a high probability that the driver will not stop when the signal is red (or at a stop sign), the vehicle shall issue a warning alerting the driver of the impending violation in sufficient time for the driver to bring the vehicle to a stop before entering into the cross-traffic path. The operational goal of the system is that by warning inattentive or distracted drivers that they are about to violate an intersection control the system reduces the likelihood and severity of intersection crashes.

The CICAS-V system is being developed under a cooperative agreement program between the Crash Avoidance Metrics Partnership (CAMP) Vehicle Safety Communications 2 Consortium (Mercedes Benz Research and Development North America, Inc., Ford, GM, Honda and Toyota), hereafter referred to as VSC2, along with the Virginia Tech Transportation Institute (VTTI), the Intelligent Transportation Systems (ITS) Joint Program Office (JPO) of the Research and Innovative Technology Administration (RITA), the National Highway Traffic Safety Administration (NHTSA), and the Federal Highway Administration (FHWA). The purpose of implementing CICAS-V is to reduce crashes due to violation of traffic control devices, including both traffic signals and stop signs. When deployed, this system is intended to

¹ Chang et al., *CICAS-V Research on Comprehensive Costs*.

- reduce fatalities at controlled intersections
- reduce the number of injuries at controlled intersections
- reduce the severity of injuries at controlled intersections
- reduce property damage associated with collisions at controlled intersections
- create an enabling environment that additional technologies can leverage to extend safety benefits further.

An initial analysis of relevant NHTSA crash databases shows that violation crashes have a variety of causal factors. The CICAS-V system is intended to address the causal factors that include driver distraction; obstructed or limited visibility due to weather, intersection geometry or other vehicles; driver inattention; and driver judgment errors. CICAS-V driver warnings may prevent many violation-related crashes by alerting the distracted or inattentive driver in sufficient time to stop the vehicle.

CICAS-V is intended to provide a cooperative vehicle and infrastructure system that assists drivers in avoiding crashes at intersections by warning the vehicle driver that an intersection violation, at an intersection controlled by a stop sign or by traffic signal, is predicted to occur. The basic concept of CICAS-V is illustrated at a high level in Figure 1 for a signalized intersection.

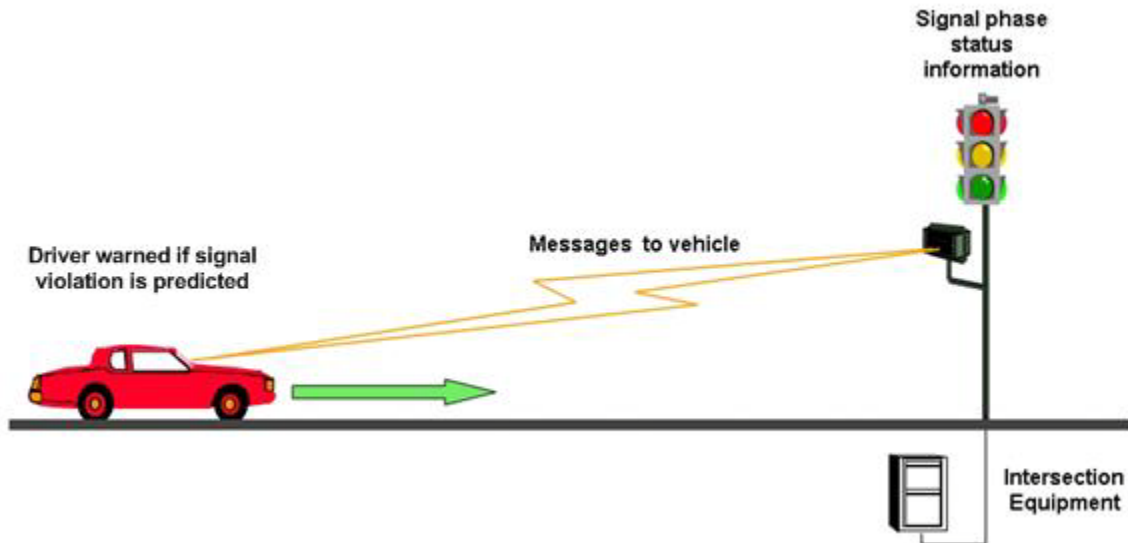


Figure 1 - Basic Concept of the CICAS-V System at a Signalized Intersection

In the figure above, a CICAS-V vehicle approaching a CICAS-V intersection receives messages about the intersection geometry and status of the traffic signal. The driver is issued a warning if the equipment in the vehicle determines that, given current operating conditions, the driver is predicted to violate the signal in a manner which is likely to result in the vehicle entering the intersection. While the system may not prevent all crashes through such warnings, it is expected that, with an effective warning, the number of traffic control device violations will decrease, and result in a decrease in the number and severity of crashes at controlled intersections.

1.2 System Scope

The CICAS-V system will include the On-board Equipment (OBE) and Roadside Equipment (RSE)² components. In this system, “components” will include system documentation, hardware, software, and firmware components. The OBE will integrate with existing vehicle systems such as the vehicle network, Vehicle Infrastructure Integration (VII) systems, and driver interface systems. The RSE will integrate with existing roadside equipment including traffic signal systems, VII systems, and Department of Transportation (DOT) communication systems.

This project will develop and test CICAS-V intersections and is split into two phases. The first phase is the development and testing of the CICAS-V system for several intersections and vehicles. After the first phase, the system will be evaluated for readiness to continue to the second phase, which is a larger field operational test (FOT).

1.3 Definitions, Acronyms, and Abbreviations

This document may contain terms, acronyms, and abbreviations that are unfamiliar to the reader. A list of acronyms used in this document can be found in Appendix A, and Appendix B contains a glossary of terms.

1.4 References

The following documents contain additional information pertaining to this project or have been referenced within this document. A general description of CICAS-V can be found in its Concept of Operations document. Other papers describe intersection violation research and human factors guidelines for driver-vehicle interfaces.

Advanced Traffic Controller (ATC) Standard Version 5.2b. Washington, DC: American Association of State Highway and Transportation Officials; Washington, DC: Institute of Transportation Engineers; Rosslyn, VA: National Electrical Manufacturers Association, 2006.

Campbell, B.N., J.D. Smith, and W.G. Najm. *Analysis of Fatal Crashes Due to Signal and Stop Sign Violations*. Washington, DC: National Highway Traffic Safety Administration, 2004.

Campbell, J.L., C. Carney, and B.H. Kantowitz. *Human Factors Design Guidelines for Advanced Traveler Information Systems (ATIS) and Commercial Vehicle Operations (CVO)*. McLean, VA: Federal Highway Administration, 1998.

Campbell, J.L., C.M. Richard, J.L. Brown, and M. McCallum. *Crash Warning System Interfaces: Human Factors Insights and Lessons Learned – Final Report*. Washington, DC: National Highway Traffic Safety Administration, 2007.

² The term “roadside equipment” or “RSE” is common to many transportation programs and, in particular, is used in Vehicle Infrastructure Integration (VII) programs in a similar context. “RSE” throughout this document will refer to the CICAS-V RSE, and others will be identified with a specific context. The VII RSE, for example, will be explicitly referred to as the “VII RSE”.

- Chang, J., D. Cohen, L. Blincoe, R. Subramanian, and L. Lombardo. *CICAS-V Research on Comprehensive Costs of Intersection Crashes*. Washington DC: National Highway Traffic Safety Administration, 2007.
- Department of Defense Test Method Standard for Environmental Engineering Considerations and Laboratory Tests*. Washington DC: United States Department of Defense, 2000.
- Green, P., W. Levison, G. Paelke, and C. Serafin. *Preliminary Human Factors Design Guidelines for Driver Information Systems*. McLean, VA: Federal Highway Administration, 1995.
- IEEE 1609.3-2006: Trial-Use Standard for Wireless Access in Vehicular Environments (WAVE)-Networking Services*. IEEE, 2006.
- IEEE 1609: WAVE Short Message Format*. IEEE, 2006.
- IEEE 802.11p: IEEE Standard for Information Technology – Telecommunications and Information Exchange Between Systems – Local and Metropolitan Area Networks – Specific Requirements – Part II: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specification*. IEEE, 2006.
- Lyons, R.D., N. Lerner, and B. Kotwal. *Preliminary Human Factors Guidelines for Crash Avoidance Warning Devices*. Washington, DC: National Highway Traffic Safety Administration, 1996.
- Maile, M., Ahmed-Zaid, F., Caminiti, L., Lundberg, J., Mudalige, P., Pall, C., Garrett, J. K., Kaiser, J. L., Mixon, L. T., and Smith, G. D. *Cooperative Intersection Collision Avoidance System Limited to Stop Sign and Traffic Signal Violations (CICAS-V) Concept of Operations*. Washington, DC: National Highway Traffic Safety Administration, In Print.
- Neale, V.L., M.A. Perez, Z.R. Doerzaph, S.E. Lee, S. Stone, and T.A. Dingus. *Intersection Decision Support: Evaluation of a Violation Warning System to Mitigate Straight Crossing Path Collisions*. Charlottesville, VA: Virginia Transportation Research Council, 2006.

1.5 System Overview

Figure 2 shows a functional decomposition schematic of the system in Normal Operating Mode.

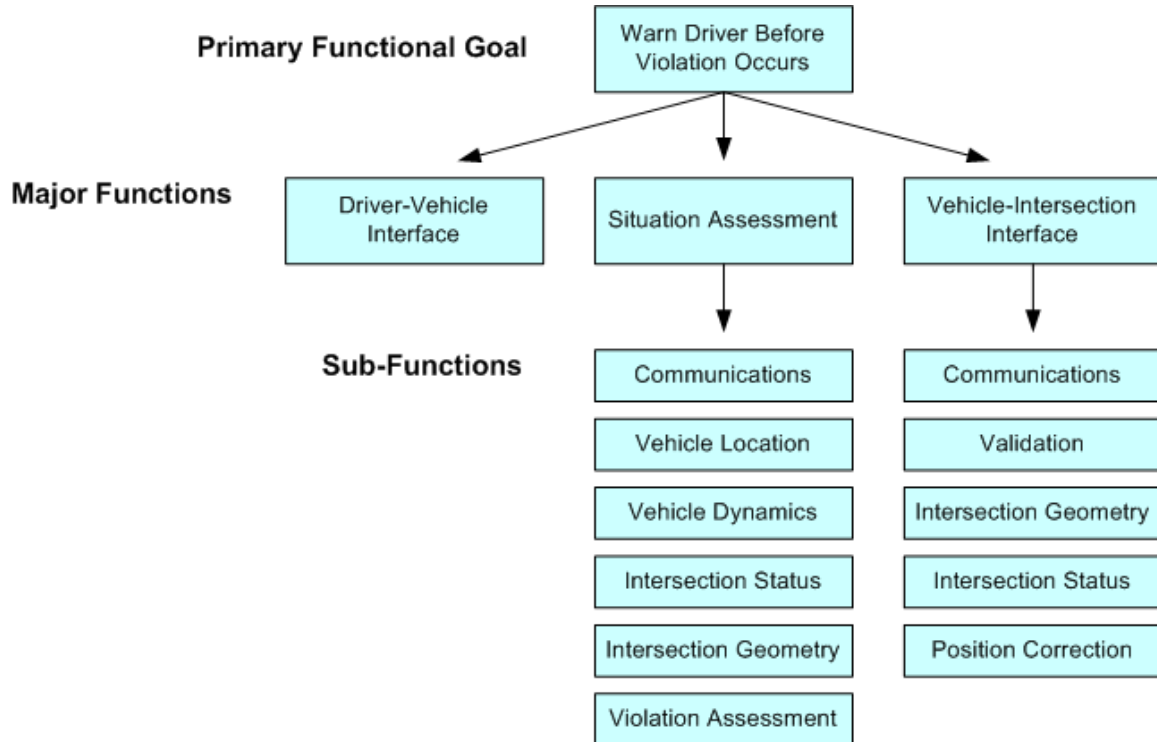


Figure 2 - CICAS-V Functional Schematic (Normal Operating Mode)

The top block, “Warn Driver Before Violation Occurs,” is a condensed version of the primary functional goal quoted above. The three blocks below the primary functional goal identify major functions needed to support the goal, and include: “Driver-Vehicle Interface”; “Situation Assessment”; and “Vehicle-Intersection Interface.” The remaining blocks represent supporting sub-functions to perform the major functions. As can be seen in the figure, some sub-functions support both the Situation Assessment and the Vehicle-Intersection Interface and are not specific to the major function.

2 General System Description

2.1 System Context

CICAS-V is intended to help a driver of a CICAS-V equipped vehicle approaching a CICAS-V equipped intersection to avoid a crossing path crash by warning the driver of an impending red-light violation or stop sign violation. To achieve benefits, it takes only a single equipped vehicle approaching a single equipped intersection at the proper time to activate the system. This “single vehicle” approach maximizes the probability of value being provided to drivers and DOTs, while simplifying deployment issues and logistics. The benefit to society increases with growing numbers of CICAS-V equipped intersections and vehicles. Because of its relative simplicity, CICAS-V is seen as a step toward the deployment of initial vehicle safety communications as well as reliable positioning and geospatial mapping techniques. Once these technologies are available and installed in vehicles, they will enable many other safety applications, including both vehicle-to-infrastructure and vehicle-to-vehicle applications.

Figure 3 below addresses logical system boundaries for CICAS-V. Items inside the dashed “CICAS-V Boundaries” are the subject of this specification and items outside the boundaries are outside the scope of this document.

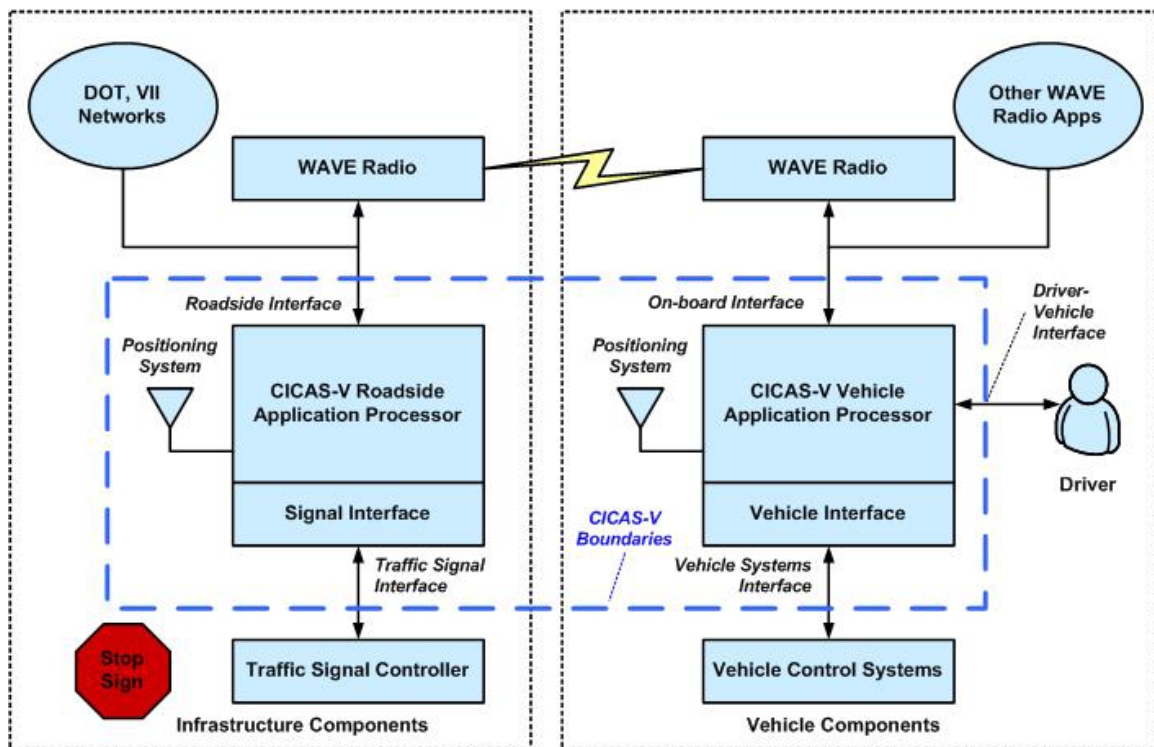


Figure 3 - CICAS-V Logical System Boundaries

Although this figure shows the Positioning System component as one of the CICAS-V components, the Positioning System may, in fact, be external to the CICAS-V system in some implementations. The Positioning System will be shown as a part of the CICAS-V requirements and architecture for completeness.

One additional boundary exists within the CICAS-V system which is based on the location of the components. Infrastructure components located on the roadside are designated as RSE components and components located on the vehicles are designated as OBE components. Documentation components can be OBE components, RSE components, or CICAS-V System components, depending on the scope and purpose of the documentation.

Requirements applying to the whole system will be phrased: “The CICAS-V System shall...” Requirements applying to CICAS-V infrastructure or vehicle components will be phrased: “The RSE components shall...” or “The OBE components shall...”

2.2 System Modes and States

The CICAS-V RSE and OBE components can exist in several modes and states. Modes are particular functioning conditions or arrangements. The modes identified for CICAS-V are:

- Startup/Validation
- Normal Operation
- System Failure
- Maintenance

The CICAS-V system will be in Normal Mode when both the RSE and OBE are in Normal Operation. The CICAS-V system will be in System Failure when either the RSE or OBE or both are in System Failure Mode. Any other combination of modes and states for the RSE and OBE lead to the CICAS-V system not able to issue a violation warning. Scenarios for these modes are provided in Section 2.8.

States represent the controlling attributes that define the system behavior. The combination of modes and states will determine how a system behaves. Since the primary behavior of the on-board portion of the system is to issue a warning to a driver if the vehicle should stop and does not appear to be stopping, there are several mode/state combinations that must be evaluated by the system to arrive at the desired behavior. Figure 4 shows the relationship between the modes of operation, the states relevant to driver notifications and warnings, and the desired behavior of the system.

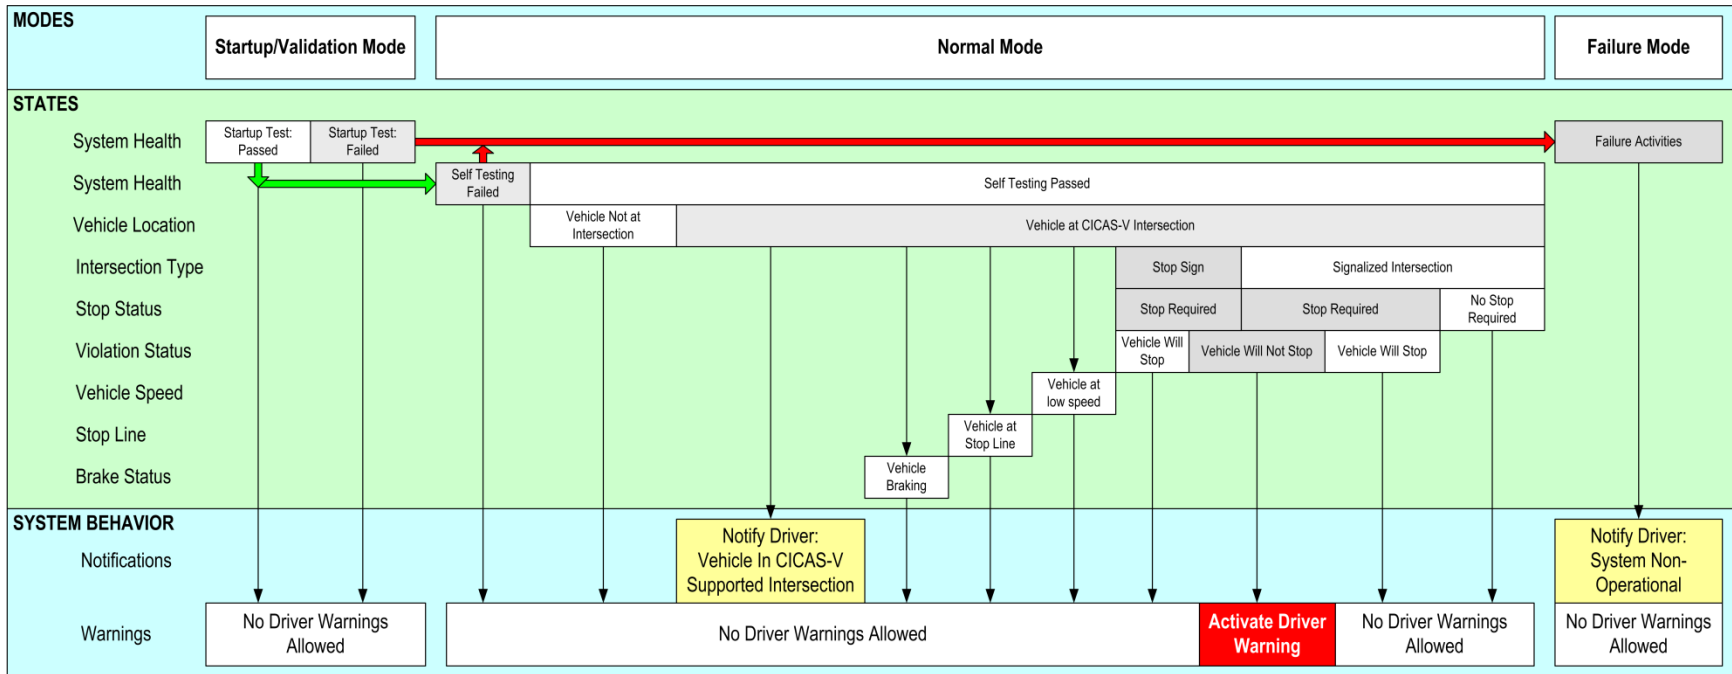


Figure 4 - CICAS-V Mode-State-Behavior Diagram

2.3 Major System Capabilities

CICAS-V capabilities are dependent on *co*-operation of infrastructure (roadway intersection) and vehicle components. Although the system can be architecturally viewed and concisely described in terms of the physical distribution of the components, it is important to reiterate that both the infrastructure and vehicle components are necessary for CICAS-V to achieve its operational objectives.

2.3.1 Infrastructure Component Capabilities

CICAS-V needs to work at both signalized and stop sign controlled intersections. Because of the signal system interface, a signalized CICAS-V intersection will always have CICAS-V intersection components, while a stop sign controlled CICAS-V intersection may or may not have CICAS-V infrastructure. The sections below discuss what capabilities are present when CICAS-V components are deployed at an intersection, and the additional capabilities that are needed when that CICAS-V intersection is also a signalized intersection. For CICAS-V intersections where there is no equipment deployed, all CICAS-V functions are performed within the vehicle.

2.3.1.1 General Infrastructure Component Capabilities

For each CICAS-V intersection with an infrastructure component, the CICAS-V roadside application processor broadcasts Wireless Access in Vehicular Environments (WAVE) messages that include, but are not limited to, the following:

1. A CICAS-V service announcement (i.e., an announcement that the intersection has information for the vehicle)³
2. A positioning correction message
3. Geospatial information messages
4. Road surface information and other weather-related data if available

The content of these messages is still undergoing revisions for the SAE J2735 standards process. The following briefly describes the contents of each of these messages. The final standardized message sets may include additional or different information.

Service Announcement: The service announcement provides vehicles with the intersection's identification (ID) code number and indicates whether the intersection's CICAS-V capability is operational. It also states whether GID or area-wide geospatial information is available, the version number of the currently available geospatial information (both GIDs and area-wide), and the channel on which the geospatial information is broadcast.

Positioning Correction Message: This message contains the positioning correction information that the vehicle uses to improve its positioning accuracy.

³This is equivalent to the WAVE Service Announcement (WSA) used in other VII contexts.

Geospatial Information Messages: There are two types of geospatial information that may be broadcast.

The first type is the *intersection* GID, consisting of the following:

- GID version
- Intersection ID
- Road/lane geometry for all approach roads
- Location of the intersection stop lines
- A lane numbering scheme that corresponds to the numbering of traffic signals and the geometry of any obstacles, dividers, etc. in the intersection box

The second type of geospatial information that may be broadcast is the *CICAS-V area* geospatial information consisting of the following:

- Geospatial information version ID
- Intersection IDs for all CICAS-V intersections within a specified area
- Intersection type IDs (e.g., signalized intersection, stop sign controlled intersection) for all CICAS-V intersections within the specified area
- Intersection GID detail for all CICAS-V controlled intersections in the specified area

The vehicle uses the GID version ID to determine if it needs to download a new version of the GID; it only does so if the GID version ID indicates that this GID is more up-to-date than the one currently stored in the vehicle's data store. The vehicle uses the intersection ID to match itself to the correct intersection in case it receives simultaneous messages from multiple intersections. The vehicle needs the road/lane geometry to match itself to the approach road and the specific lane⁴ on the approach road, if such accuracy is needed. The vehicle uses the location of the intersection stop lines, which could be different for different lanes, to determine the distance from the stopping location. This distance is an important parameter for the warning calculation. The lane numbering scheme has to correspond to the traffic signal phase and timing scheme so that the vehicle can determine which signal information is pertinent.

A signalized intersection's CICAS-V equipment must be placed at a point along the travel path to the intersection where it can complete transmission of GID updates in time for basic safety assessment algorithms to decode the information and calculate the likelihood of a traffic control violation. An RSE for download of area geospatial information must be placed such that it can complete the download of the area CICAS-V geospatial information before the vehicle leaves the equipment's transmission range.

Road Surface Information and Other Weather-Related Data: CICAS-V equipment might transmit information to the vehicle about the road surface coefficient of friction at the intersection and weather related data such as dew point, temperature, visibility, rain, etc. that might help the in-vehicle CICAS-V system adjust the warning timing to take reduced friction into account.

⁴ Examples of different lane types that need to be identified are: dedicated left/right turn lanes and bicycle lanes that can be used as turn lanes. Other types exist.

2.3.1.2 Infrastructure Component Capabilities Specific to Signalized Intersections

At signalized intersections, the CICAS-V infrastructure-side equipment broadcasts an additional message containing traffic signal phase and timing data. The signal phase and timing message contains information and current status on the phase and timing of all the signals for each approach in the intersection. This message, together with the intersection GID, will enable the vehicle to determine which signal indication applies to it and use this information for determining whether a warning is warranted.

2.3.2 Vehicle Component Operation

When a CICAS-V equipped vehicle approaches a CICAS-V equipped intersection, the actions that the vehicle performs depend on whether the intersection is signalized or has a stop sign and on whether the intersection has CICAS-V infrastructure components. The scenarios in Section 2.8 and Table 1 summarize what occurs in the vehicle as it approaches a CICAS-V equipped intersection. In all cases, the assumption is that the vehicle has previously received a download of GID information that identifies the CICAS-V intersection. If it has not received that download, the actions described for “Stop Sign Controlled Intersections without Equipment” cannot be performed

If the intersection has CICAS-V equipment, the vehicle also has to determine whether it has detected any problems with that equipment. If, for example, the vehicle does not receive a service announcement at an intersection that its internal geospatial information memory identifies as a CICAS-V equipped intersection, the vehicle should store the information about a malfunctioning CICAS-V intersection and broadcast this information to the next functional CICAS-V roadside equipment that it encounters. Not receiving expected messages constitutes an error condition that the vehicle should report at the next functional CICAS-V intersection equipment it encounters.

Table 1 - Summary of Action Sequences at CICAS-V Intersections

Step No.	CICAS-V Signalized Intersection	CICAS-V Stop Sign Intersection with Equipment	CICAS-V Stop Sign Intersection without Equipment
1	Vehicle approaches a CICAS-V equipped intersection.	Vehicle approaches a CICAS-V equipped intersection.	Vehicle approaches a CICAS-V intersection.
2	When in range of the RSE, vehicle receives a CICAS-V service announcement on the control channel indicating the availability of the intersection's GID, area geospatial information, the status of the intersection, and positioning corrections if needed.	When in range of the RSE, vehicle receives a CICAS-V service announcement on the control channel indicating the availability of the intersection's GID, area geospatial information, and positioning corrections if needed.	N/A. (This may occur at a different location, where a CICAS-V RSE exists.)
3	Vehicle decides if it needs either the GID or the area geospatial information broadcast, or both.	Vehicle decides if it needs either the GID or the area geospatial information broadcast, or both.	N/A. (This may occur at a different location, where a CICAS-V RSE exists.)
4	If necessary, the vehicle switches to the service channel to receive the intersection's GID and/or the area geospatial information.	If necessary, the vehicle switches to the service channel to receive the intersection's GID and/or the area geospatial information.	N/A. (This may occur at a different location, where a CICAS-V RSE exists.)
5	Vehicle receives the intersection's GID and/or the geospatial information.	Vehicle receives the intersection's GID and/or the geospatial information.	N/A. (This has occurred previously at a different location, where a CICAS-V RSE exists.)
6	Vehicle stores the new GID and/or geospatial information in its data store, replacing older versions.	Vehicle stores the new GID and/or geospatial information in its data store, replacing older versions.	N/A. (This may occur at a different location, where a CICAS-V RSE exists.)

Step No.	CICAS-V Signalized Intersection	CICAS-V Stop Sign Intersection with Equipment	CICAS-V Stop Sign Intersection without Equipment
7	Vehicle decodes the intersection GID and performs geospatial matching to locate itself relative to the intersection at the road or lane level, whichever is appropriate.	Vehicle decodes the intersection GID and performs geospatial matching to locate itself relative to the intersection at the road or lane level, whichever is appropriate.	Vehicle decodes the intersection GID and performs geospatial matching to locate itself relative to the intersection at the road level.
8	Vehicle informs the driver that it is approaching a CICAS-V intersection.	Vehicle informs the driver that it is approaching a CICAS-V intersection.	Vehicle informs the driver that it is approaching a CICAS-V intersection.
9	Vehicle determines from available parameters (e.g., GID, position, speed, driver behavior, signal phase and timing) if a violation is likely to occur.	Vehicle determines from available parameters (e.g., GID, position, speed, driver behavior) if a violation is likely to occur.	Vehicle determines from available parameters (e.g., GID, position, speed, driver behavior) if a violation is likely to occur.
10	If a violation is likely to occur, as determined by the warning parameters in the vehicle's safety assessment algorithm, vehicle issues a warning to the driver through the Driver-Vehicle Interface (DVI).	If a violation is likely to occur, as determined by the warning parameters in the vehicle's safety assessment algorithm, vehicle issues a warning to the driver through DVI.	If a violation is likely to occur, as determined by the warning parameters in the vehicle's safety assessment algorithm, vehicle issues a warning to the driver through DVI.
11	Driver reacts to the warning and takes appropriate action.	Driver reacts to the warning and takes appropriate action.	Driver reacts to the warning and takes appropriate action.
12	Vehicle may broadcast that a warning has been issued to the driver (optional).	N/A.	N/A.
13	Vehicle may broadcast CICAS-V diagnostic messages.	Vehicle may broadcast CICAS-V diagnostic messages.	N/A.

2.4 Major System Conditions

This section discusses the conditions under which the system must work and meet its [performance](#) goals.

OBE Environment – The OBE hardware components must meet the temperature, humidity, vibration, and shock standards established by applicable automotive standards.

OBE Reliability – The OBE hardware components should be reliable. OBE hardware components must meet the reliability standards established by applicable automotive standards.

OBE Power – The OBE hardware components must function normally on 12 VDC +/- 1 VDC power.

RSE Environment – The RSE hardware components should meet the same temperature, humidity, vibration, and shock standards as those set for other ITS roadside equipment by AASHTO/ITE/NEMA standards. (-37 C to +74 C, 9-95% Relative Humidity non-condensing, Shock per MIL-STD-810E Method 516.4, Vibration per MIL-STD-810E Method 514.4 equipment class G)

RSE Reliability – The RSE hardware components should be reliable. Typical roadside ITS equipment specifications require a component Mean-Time-Between-Failure (MTBF) of 100,000 operating hours or better.

RSE Power – Components shall properly operate within the following limits unless otherwise noted. For primary power:

- Line voltage – 90 to 135 VAC
- Frequency – 60 (+/- 3.0) Hertz

Other operating constraints may apply for backup power.

RSE Mounting – RSE hardware may be installed in existing cabinets which require pole-mount, rack-mount, or shelf-mount configurations. The RSE must be configurable for these mounting configurations.

2.5 Major System Constraints

The CICAS-V system design is based on the foundation infrastructure provided by the VII deployment. As such, there are some VII constraints which apply to CICAS-V:

- Radios will use the WAVE standards, based on the Dedicated Short Range Communications (DSRC) standard approved by the Federal Communications Commission (FCC) for use by automotive safety systems.
- The WAVE radios will transmit at a frequency of 5.9 GHz and have a range limited to about 1000 meters. Their range radius may be reduced in urban environments where radio communications are affected by buildings, trees, or other signal-blocking structures.

2.6 User Characteristics

This section was developed based on input from CICAS-V stakeholders who include members of the United States Department of Transportation (USDOT), vehicle manufacturers, and state and local DOTs. The concepts represented here are subject to change as the CICAS-V operating model is determined.

Users of CICAS-V include the organizations, agencies, and individuals that are necessary for installing, maintaining, operating, and interacting with a functioning CICAS-V system. The primary users of CICAS-V are:

- Automobile Original Equipment Manufacturers (OEMs) – responsible for original equipment, and for vehicle-related equipment and software actions necessary to establish and maintain the in-vehicle CICAS-V system.
- State and local governments and their DOTs – responsible for all infrastructure-related actions except those handled by the VII Network Operating Entity, necessary to establish and maintain CICAS-V systems.
- USDOT – responsible for developing high level guidance to state and local agencies in the deployment and operation of CICAS-V systems.
- Vehicle drivers – responsible for the decisions made when approaching and entering an intersection. Drivers are also responsible for the following:
 - Familiarizing themselves with the vehicle safety features
 - Maintaining the vehicle, including the CICAS-V components
 - Assessing the traffic situation when an alert is issued and making a decision
- Traffic control equipment manufacturers – responsible for the development and maintenance of infrastructure equipment and software that can interface with CICAS-V (and other related safety systems, as they are fielded).
- VII Network Operating Entity – responsible for the network that will supply the communications supporting CICAS-V.
- Organization responsible for CICAS-V guidelines and standards – responsible for rules and procedures necessary for CICAS-V systems and components to become operational.

2.6.1 Automobile OEMs

Automobile OEMs may incorporate their role into existing organizational structures. There are additional roles that they will assume to help ensure that CICAS-V remains in operation over the long-term. These roles include:

- Developing standards and certification procedures
- Training personnel in CICAS-V systems
- Installing CICAS-V hardware and software in new vehicles.

2.6.2 State and Local DOTs

Since state and local DOTs currently have the responsibility for intersection safety they are viewed as having the primary role for the installation and maintenance of CICAS-V equipment at intersections.

State and local DOTs may incorporate the operation and maintenance of CICAS-V infrastructure-side applications and equipment into their existing transportation management organizations. Additional roles that they may assume include the following:

- Planning, identifying, and selecting CICAS-V intersections
- In conjunction with other states and local DOT and traffic control equipment manufacturers, maintenance of test beds for testing enhancements and changes to CICAS-V infrastructure-side software and equipment.
- Developing maintenance plans for CICAS-V equipment at intersections
- Installing CICAS-V equipment at selected intersections
- Installing and maintaining connectivity between the CICAS-V equipment at intersections and the traffic signal controller assembly
- Validating and maintaining CICAS-V operation at equipped intersections
- Providing backend connectivity from roadside equipment to Traffic Control Centers, if needed or desired
- Generating, maintaining, and updating GID and other geospatial information (Note that responsibility for this item is to be determined, and the state and local DOTs may choose to delegate this role to another entity.)
- Participating in standards development activities
- Training personnel in CICAS-V systems
- Implementing and maintaining connectivity from the VII backbone network to state and local DOT centers

2.6.3 USDOT

The USDOT may incorporate its role into its existing organizational structures. There are additional roles it may assume to enable the success of a nationwide deployment of CICAS-V. These roles include:

- Development of guidelines to assist state and local agencies in the installation, operation, and maintenance of CICAS-V systems;
- Development of training materials and training courses related to CICAS-V system installation, operation, and maintenance;
- Development of automated tools that can be used to assist in the deployment design of CICAS-V component deployments at specific intersections and in the performance monitoring of CICAS-V systems;
- Participation in joint working groups and standards activities to continually assess stakeholder needs with respect to CICAS-V and VII.

2.6.4 Vehicle Drivers

The initial user for the system is a light vehicle driver. The CICAS-V is intended to alert a driver to an impending intersection violation so that the driver can stop the vehicle in an appropriate manner and avoid crashes.

The contributing factors for intersection violations include the following:

- Obscured or obstructed vision
- Driver distraction

- Judgment errors
- Speeding
- Driver inattention

CICAS-V is intended to address these factors, and it is important to note that the operation of CICAS-V does not depend in any way on these contributing factors. The DVI alert will be presented to the driver if needed, regardless of why the driver is not stopping. The driver response may vary depending on driver behavior and condition, so the overall effectiveness of CICAS-V may also vary based on the nature of the contributing factors.

2.6.5 Traffic Control Equipment Manufacturers

Traffic control equipment manufacturers may enhance and modify their organizations to incorporate CICAS-V into their product lines. This role includes ensuring that CICAS-V (and other related safety systems) remains in operation over the long term. Specifically, the manufacturer's role will include:

- Developing and producing new traffic control equipment that includes the hardware and software required for CICAS-V capabilities
- Retrofitting existing traffic control equipment to accommodate CICAS-V functionality
- Participating in standards activities
- Developing test and installation procedures for CICAS-V infrastructure-side equipment in conjunction with state and local DOTs
- Training personnel in CICAS-V systems
- Training state and local DOT personnel in the operation and maintenance of CICAS-V infrastructure-side equipment
- Maintaining application software for CICAS-V infrastructure-side equipment.

The roles of manufacturers' trade support and standards organizations are represented in Section 2.6.7 below.

2.6.6 VII Network Operating Entity

The VII program is in the process of defining the role of a VII Network Operating Entity. This entity will be tasked with the implementation and management of all aspects of the VII network that include the wireless communication between a CICAS-V equipped vehicle and the VII RSE, communications across the backbone network, connectivity to VII Network end users, central processing systems required for network and applications support, and nationwide operation centers. The elements of the VII Network Operating Entity's role that are important to CICAS-V include the following:

- Implementing and maintaining the VII backbone network to include transmission equipment, computing systems, and operations centers that may be necessary to sustain the nationwide network
- Establishing and managing standards activities that are related to WAVE communications

- Establishing, managing, and enforcing policies related to the use of and access to systems that are part of the network; as well as data transmitted using the VII network
- Establishing, implementing, and managing a security program that addresses both physical and logical threats to the system
- Certifying software for compliance with the Federal Information Security Management Act (FISMA) and other applicable regulations

2.6.7 Organization Responsible for CICAS-V Guidelines and Standards

The organization that will be responsible for CICAS-V guidelines and standards has not yet been identified. The guidelines and standards organization will define the rules and procedures used to determine that CICAS-V equipped intersections are ready for operational use. At a minimum, when the CICAS-V system is ready for operational use at an intersection, the CICAS-V infrastructure-side equipment, the interfaces between CICAS-V and the traffic signal controller assembly, and all other related equipment must be performing to specified system-level parameters. The guidelines and standards organization will specify the system-level performance parameters, the guidelines for certification, and the guidelines for any diagnostic procedures. These roles are part of a set of issues that need to be resolved as part of the VII program.

2.7 Assumptions and Dependencies

The CICAS-V system is initially intended to work with “light vehicles”. The term “light vehicles” refers to passenger vehicles sold or operated legally within the U.S., including sedans, light trucks, and vans.

It is assumed that appropriate driver warnings will alert the driver and allow appropriate countermeasures to be taken. That is, CICAS-V warnings should increase the likelihood that the driver will stop the vehicle and avoid a crash.

The driver response may vary depending on driver behavior and driving conditions, so the overall effectiveness of CICAS-V may also vary depending on the contributing factors. It is understood that vehicles traveling significantly over the speed limit may approach an intersection too fast for the CICAS-V systems to provide a warning to the driver in time for the vehicle to stop before entering the intersection.

Based on the current VII architecture, it is assumed that the CICAS-V equipped signalized intersection will have the following equipment:

- A WAVE Radio System
- Roadside equipment (RSE) including memory, interfaces, and an application processor for running the CICAS-V application
- One or more systems for positioning augmentation to aid vehicles in determining their position with sufficient accuracy
- A network connection for remote maintenance access, status reporting, and updates (if needed or desired)
- A means of determining the current signal phase and timing of all signal heads in the intersection

Similarly, it is assumed that the CICAS-V equipped vehicles will have the following equipment:

- A WAVE Radio System
- On-board equipment (OBE) including memory, interfaces, and an application processor for running the CICAS-V application
- Positioning system
- Vehicle Systems capable of reporting vehicle speed, deceleration, and braking status

2.8 Operational Scenarios

CICAS-V has four groups of operating scenarios – Startup/Validation, Normal Operation, System Failure, and Maintenance.

- The Startup/Validation Mode scenarios occur after CICAS-V equipment is installed at an intersection and provides a final test before going into normal operation.
- The Normal Operation Mode scenarios occur after the System has been placed in service. In these scenarios, a CICAS-V equipped vehicle is approaching a CICAS-V equipped intersection and all equipment is functioning correctly.
- System Failure Mode scenarios occur when either the intersection or vehicle fails a built-in test.
- Maintenance Mode scenarios cover system communication to backend or local networks.

Table 2 shows the relationship between the four groups of operating scenarios and the supporting data types that define states within the scenarios, and the functional requirements for the operational mode and data states.

Table 2 - CICAS-V Scenarios

Operational Scenario Data Types		Requirement from CICAS-V ConOps	
Startup/ Validation	Coverage		
	Positioning		
	Geospatial Information		
	Phase and Timing		
Normal Operation	Intersection Types	Stop Sign	<ul style="list-style-type: none"> • Before a CICAS-V intersection is put into operational service, it is put in Validation Mode to complete the testing of the cooperation between vehicles and the intersection. • Alert potential violators of traffic control devices in time for the driver to take action to prevent a violation. • Acceptable rate of false alarms and missed alarms when an alarm should have been issued. • Work with transit signal priority and emergency vehicle signal preemption. • Coexist with other collision avoidance systems, e.g., rear-end collision avoidance, lane change collision avoidance, roadway departure collision avoidance. • Alert must be appropriate for most drivers, including inexperienced (e.g., teenaged) drivers and older drivers (e.g., slower reflexes, impaired hearing). • Work in all weather and lighting conditions. • Perform effectively in urban, suburban, and rural areas. • Perform effectively in a wide range of different intersection approach geometries. • Messages, warnings, icons, and other types of alerts that are effective and compatible with automotive human factors guidelines and OEMs' driver-vehicle interface principles and practices. • Driver-vehicle interfaces need to follow Human Factors guidelines issued by the Federal Highway Administration (FHWA) and the National Highway Traffic Safety Administration (NHTSA).
		Flashing Red Light	
		Flashing Yellow Light	
		Traffic Signal	
	Traffic Signal Types	Fixed Signal Timing	
		Actuated Signal	
		Emergency Preemption	
		Advanced Signal Controller	
	Intersection Conditions	Right Turn Lane	
		Left Turn Lane	
		Positioning Services	
		Reduced Visibility	
		Speed Limit	
		Road Conditions	
Driver-Vehicle Interface	Alert of Approaching Intersection		
	Warning of Probable Red Light/Stop Sign Violation		
System Failure	Geospatial Database Errors	<ul style="list-style-type: none"> • If the vehicle receives no messages from the intersection, it must assume that the intersection is not equipped for CICAS-V communications. • When a CICAS-V intersection takes itself off-line as the result of a self-diagnosed fault, it must report its off-line status. • A vehicle needs to inform the driver when the in-vehicle CICAS-V system is not working. 	
	GID Errors		
	Communication Errors		
	Vehicle Equipment		
Maintenance	Network Interface	<ul style="list-style-type: none"> • The RSE must be able to communicate with the backend center for security validation and software updates. 	
	Local Interface		

2.8.1 Startup and Intersection Validation Scenarios

Conditions: The CICAS-V Infrastructure components have been installed successfully as described in the CICAS-V Intersection installation handbook. Before the intersection is put “in service”, it is put in Validation Mode to complete the testing of the cooperation

between vehicles and the infrastructure-side equipment. Maintenance vehicles that are CICAS-V equipped will be used for validating positioning accuracy, WAVE radio communications, messages (timeliness and correctness), signal phase and timing accuracy, and signal head/lane matching accuracy.

Once CICAS-V has been installed at an intersection, the CICAS-V RSE is set to Validation Mode. A service announcement communicates this state to approaching maintenance vehicles. While the CICAS-V system is in Validation Mode, the maintenance vehicles traversing the intersection will need to provide feedback to the intersection RSE on their movements through the intersection so that the CICAS-V system can correlate these movements with its internal information, including the geospatial database and the signal phase and timing information, to validate that the system is performing as expected. The intersection will normally remain in Validation Mode until the appropriate validation requirements are met. While the CICAS-V system is in Validation Mode, its location will be included in all relevant geospatial databases that are propagated to vehicles that regularly traverse an area.

The specific types of data collection that will be performed as part of the validation process include the following:

Coverage Validation Data: CICAS-V equipped maintenance vehicles will record their location and a measure of data quality, such as packet error rate. They will then send this information to the intersection RSE, which will develop a coverage map for its specific transmitter. This actual coverage map will be compared to the intersection design's minimal required coverage map, which will be defined in the performance specifications. If the coverage is not better than the minimum required coverage, the intersection will remain in Validation Mode

Positioning Validation Data: CICAS-V equipped maintenance vehicles will record positioning errors, positioning system data, and other available parameters that they detect as they approach that intersection. This information will be sent to the intersection RSE before the vehicle leaves the area. The actual positioning data from vehicles approaching the intersection will be compared to the positioning system requirements in the CICAS-V intersection.

Geospatial Information Validation Data: CICAS-V equipped maintenance vehicles will broadcast a message containing their location, speed, and direction. These messages will show the movement of the vehicles through the intersection at the lane level and this information can be used to determine whether the GID is correct.

Phase and Timing Validation Data: CICAS-V equipped maintenance vehicles will broadcast a message containing their location, speed, and direction. The CICAS-V intersection RSE will receive these messages and develop a control map of the intersection. This control map will correlate movement of vehicles through the intersection with data from the traffic signal controller assembly as to which lights are active. The operating entity will validate that the control map corresponds to the broadcast signal phase and timing from the intersection.

Once the requirements to put the CICAS-V intersection “in service” are met, the responsible organization will change the intersection from Validation Mode to Normal Operation Mode.

2.8.2 Normal Operation Scenarios

The following scenarios describe the normal operations of the CICAS-V system. In each of these scenarios, the state of the driver is unknown. The driver may be attentive, inattentive, distracted, incapacitated, or impaired. The driver may have the intent to obey or violate the traffic control he or she is approaching.

2.8.2.1 Simple Traffic Signal Approach

Conditions: The CICAS-V enabled vehicle is approaching a CICAS-V enabled traffic signal at a simple intersection with no dedicated turn lanes, where all vehicles on the same approach have the same traffic signal indication.

As the vehicle approaches a CICAS-V enabled intersection and comes in range of the system’s communications, the vehicle receives a CICAS-V service announcement on the control channel indicating the availability of the intersection’s GID, area geospatial information, the status of the intersection, and positioning corrections. The vehicle decides if it needs either or both of the GID or the area geospatial information broadcast. If necessary, the vehicle switches to the service channel and receives the intersection’s GID and/or the area geospatial information. The vehicle stores the new GID and/or geospatial information in its data store, replacing any older information. The vehicle decodes the intersection GID and performs geospatial matching to locate itself relative to the intersection at the road or lane level, whichever is appropriate.

The vehicle then determines that the driver is approaching a CICAS-V enabled intersection with a single traffic signal indication, and that the driver has to stop at the signal, if it is red. At an appropriate distance from the intersection, the vehicle may alert the driver that a traffic signal is ahead. If the vehicle determines that the vehicle will come to a stop before a violation occurs, no warning will be issued. If the vehicle continues to approach the signal without slowing down sufficiently to stop when the light is red, the vehicle will issue a warning.

The distance and timing of the alert and warning will be calculated based on the current operating conditions of the vehicle, roadway geometry, and traffic signal state. The calculation may also include roadway conditions, if this information is available.

The alert/warning may be in the form of an audio signal, either tone or voice, possibly coupled with visual and/or haptic indications to the driver, depending on the DVI decisions made by the vehicle’s OEM. Also, there may be some preparation for a possible crash of the vehicle, such as pre-tensioning of safety belts or priming of brake assistance systems. This preparation depends on the individual decisions of the vehicle’s OEM. The driver may or may not be aware of some of these crash mitigation actions.

With a driver who is willing to violate the traffic control, alerts and warnings of an upcoming traffic control may or may not have an effect on the driver’s decision about stopping. For a driver who is distracted or otherwise inattentive, the alerts and warnings

are intended to bring the driver's attention back to the driving situation so that the proper decisions can be made.

If CICAS-V, in the future, is implemented with traffic signal adaptation, it may improve the situation by keeping the traffic signal in an 'all-red' phase long enough to permit the violating driver to clear the intersection before the cross-traffic is permitted to enter. However, this may require a mechanism at the intersection to prevent drivers from learning that they can abuse the system.

2.8.2.2 Simple Stop Sign Approach

Conditions: The CICAS-V enabled vehicle is approaching a CICAS-V enabled, simple stop sign controlled intersection. It is presumed that the vehicle has previously obtained GID for the intersection as described in the prior scenario.

The vehicle determines that the driver is approaching a CICAS-V enabled intersection with a stop sign control. At an appropriate distance from the intersection, the vehicle may alert the driver that a stop sign is ahead. If the vehicle determines that the driver is going to stop, no warning will be issued. If the vehicle continues to approach the stop sign without slowing down sufficiently to stop, the vehicle issues a warning.

The distance and timing of the alert and warning will be calculated based on the vehicle operating conditions and road geometry. The calculation may also include roadway conditions, if this information is available.

This warning is likely to be in the form of a multi-modality alert. The alert or warning may be in the form of an audio signal, either tone or voice, possibly coupled with visual and/or haptic indications to the driver, depending on the DVI decisions made by the vehicle's OEM. Also, there may be some preparation for a possible crash in the vehicle, such as pre-tensioning of safety belts or priming of brake assistance systems, again depending on the individual decisions of the vehicle's OEM. The driver may or may not be aware of some of these crash mitigation actions.

With a driver who is willing to violate the traffic control, alerts and warnings of an upcoming traffic control may or may not have an effect on the driver's decision about stopping.

2.8.2.3 Intersections with Dedicated Left or Right Turn Lanes

Conditions: The CICAS-V enabled vehicle is approaching a CICAS-V enabled intersection with multiple traffic signal indications on the approach.

The normal operation scenario for this case is the same as the one for the simple signal approach since it is assumed that the vehicle is able to lane match itself through positioning and the intersection GID, and therefore identify which traffic signal indication pertains to its current location.

Appropriate protocols will have to be developed for the case in which a warning is needed but it cannot be determined which of the approach lanes the vehicle will take to pass through the intersection (e.g., prior to formation of the turn lane).

Figure 5 illustrates the situation where a vehicle enters a dedicated left turn lane (the eastbound approach in this illustration) that has a red left turn indication when the through lanes on the approach have a green indication. The signal indications for the movements on this approach can be seen just below the approach. A red arrow is shown for left turn and green arrows are shown for the through and right turn movements.

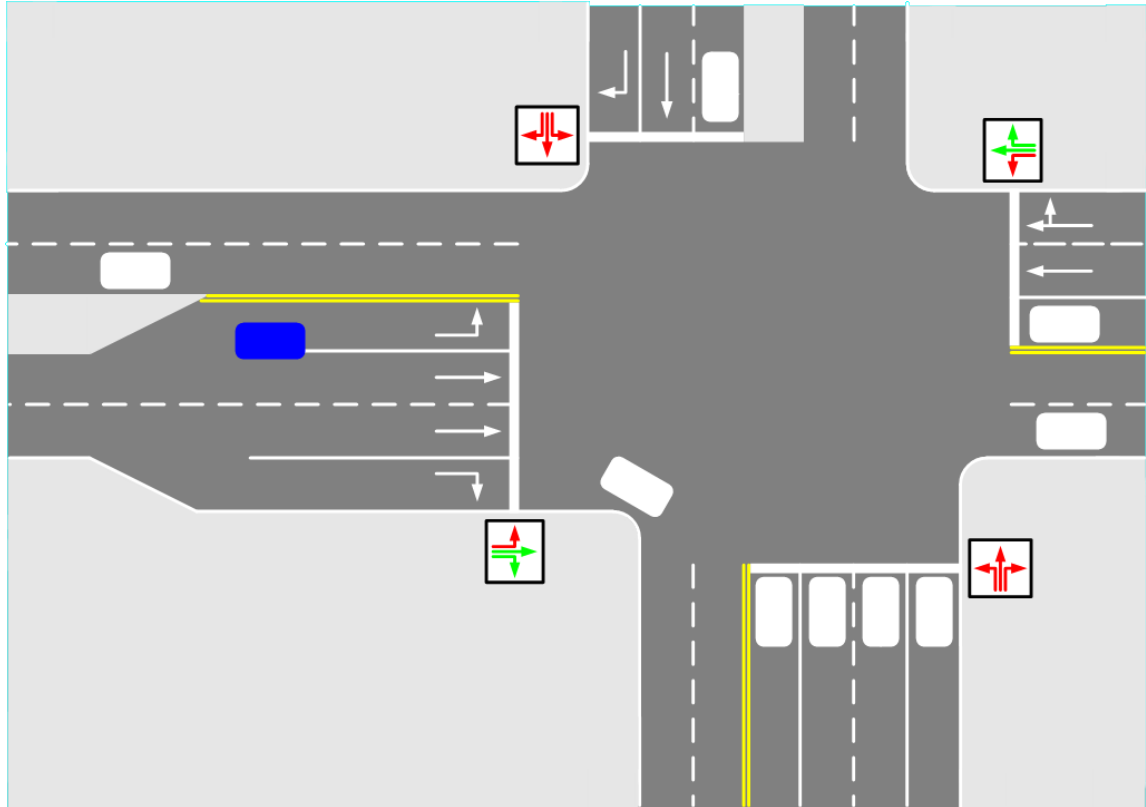


Figure 5 - Vehicle Entering a Dedicated Left Turn Lane

2.8.2.4 Approaching an Intersection with Limited Positioning Services

If the vehicle's positioning system is operating, there are two levels of local positioning limitations:

1. Vehicle is not able to position itself with WhichRoad precision, where needed.
2. Vehicle is not able to position itself with WhichLane precision, where needed.

In the first case, the vehicle's CICAS-V processes will be inactive for this intersection. In the second case, there are three possibilities, if WhichRoad positioning can be maintained:

1. The vehicle's CICAS-V processes are inactive for this intersection.
2. The vehicle's CICAS-V processes will only consider the signals for the through-lanes.
3. The vehicle's CICAS-V processes will determine the violation potential for all reasonable/possible approaches and will consider the signals if there is a

consensus for signal state across all approaches. (e.g. “all lights red”, “all lights green”).

The consistent inability of vehicles to position themselves at a specific intersection should be detected through ongoing monitoring and validation.

2.8.2.5 Flashing Traffic Signal

If a CICAS-V equipped traffic signal goes into flashing mode, the CICAS-V system will recognize the flashing indication (e.g., flashing red light) and broadcast the appropriate information in the message set sent to the vehicle. As in normal CICAS-V operation, the CICAS-V enabled vehicle will receive the message set, recognizing the flashing signal indication and react to this information as prescribed in the CICAS-V warning and alert algorithms. Drivers and CICAS-V should both treat a flashing red traffic signal as a stop sign (i.e., driver must stop the vehicle).

2.8.2.6 Reduced Visibility

There are two types of reduced visibility scenarios that CICAS-V must consider. The first is when the reduced visibility is caused by weather, such as rain, snow, fog, or time of day (for darkness or sun glare). The second is when the reduced visibility is caused by obstructions in the driver’s line of sight to the traffic control, e.g., vegetation, or a temporary object (such as a large parked or moving truck that blocks a driver’s line of sight). In both cases, the presence of CICAS-V in the vehicle and in the intersection enables the driver to be alerted about the presence of the traffic control and alerted to the potential for a violation. The system will react as it would if there was no reduced visibility, although the driver response may differ because the driver may not be able to visually confirm the state of the traffic control device.

2.8.3 System Error and Failure Scenarios

This section describes some of the scenarios that may occur when various aspects of the system fail to operate.

2.8.3.1 Geospatial Database Errors

A CICAS-V geospatial database contains the locations of CICAS-V intersections. Appropriate information from this database will be broadcast to CICAS-V enabled vehicles entering an area, possibly covering multiple intersections. Stop sign information in this database can have two types of errors. These errors are discussed below.

Inclusion of Nonexistent Stop Signs – Inclusion of nonexistent stop signs may increase potential traffic conflicts if drivers stop for no apparent reason. This situation will certainly lead to annoyance and reduced trust, both for the driver responding to the nonexistent stop sign warnings, and other drivers in the area trying to figure out what’s going on. This might be detected through statistical analysis of probe data start/stop events as with the omission of stop signs above.

2.8.3.2 GID Errors

GID errors for CICAS-V intersections mean that the geospatial data the vehicle receives from the intersection does not adequately reflect the actual geometry of the intersection or, for signalized intersections, the assignment of signal heads to the lanes. When a new CICAS-V intersection is put online, the validation procedures of the DOT operating the intersection should detect those errors and correct them before the intersection becomes active. However, temporary lane closures or re-routings due to maintenance or construction activities, police actions, or roadway debris may not be reflected in the geospatial information database. When this occurs, a vehicle might experience a false alert. For long-term lane changes, it is the responsibility of the DOT operating the intersection to put the intersection “off-line”, i.e., in *inoperative* state, until a correct GID can be uploaded or the lanes are restored to their original states.

2.8.3.3 Communication Failure

Communication failure means that the vehicle does not receive some or all messages from the intersection. The cause of the communication failure may be due to the intersection’s equipment, the vehicle’s equipment, or interference from temporary, radio-blocking objects (e.g., a large truck) in the area. If the vehicle receives no messages from the intersection, it must assume that the intersection is not CICAS-V equipped.

The discussions below address the situation where the communication problem lies with the intersection and the vehicle is able to receive some WAVE messages, but not others.

Service Announcement – If the vehicle does not receive a service announcement, then it will not switch to another channel to receive a GID or geospatial information broadcast. The vehicle can determine, by its reception of other messages (such as signal phase and timing), that it is approaching a CICAS-V enabled intersection. However, the vehicle should communicate the malfunction to the next CICAS-V RSE.

Geospatial Information – If the vehicle does not receive a geospatial information broadcast (whether of the intersection GID or of area-wide geospatial information), then its actions depend on whether the vehicle has a GID of the intersection in on-board data storage. If the intersection’s GID is available, then the vehicle can use this GID, although there is a risk that the information may be inaccurate, depending on its age. Otherwise the CICAS-V processes will be inactive for this intersection.

Traffic Signal Phase and Timing – If no traffic signal phase and timing information is received for CICAS-V enabled signalized intersections, then the vehicle’s CICAS-V processes will be inactive for that intersection. If one traffic signal phase and timing message is received, then the response will depend on the intersection. If the traffic signal is on a fixed schedule, then the vehicle can determine from the information contained in the message when the light is changing and can function in the default way. If it is a traffic-actuated signal, then the reaction of the vehicle will depend on the current phase and timing information it receives.

Positioning Correction – If the vehicle does not receive a positioning correction message, then the CICAS-V response scenario will be that of an intersection with limited positioning services as described in Section 2.8.2.4.

2.8.4 Maintenance Scenarios

Conditions: The CICAS-V Intersection is “in service” and a diagnostic self-test is set to trigger at an interval as set by the operating entity. This diagnostic functionality is identical to the Validation Mode, but unlike the Validation Mode, where there is manual intervention to put the system “in service”, the CICAS-V application at the intersection automatically switches in and out of diagnostic self-testing.

The positioning accuracy, WAVE radio communications, messages (timeliness and correctness), signal phase and timing accuracy, and signal head/lane matching accuracy of CICAS-V intersections must be periodically verified. Diagnostic data to verify that the system is functioning as required will be collected from vehicles. Maintenance vehicles do not have to be used to communicate with the system for diagnostic testing. However, if a problem is detected, the CICAS-V application must automatically take itself “out of service” and send notification to traffic operations that there is a problem.

3 System Capabilities, Conditions and Constraints

The high-level requirements are developed by defining the user needs. From these a list of major requirements is created which, in turn, will have sub-requirements that are identified. This logical partitioning is based on the behavior described in the ConOps document and on the scenarios described in Section 2. These requirements may not be well defined early in a project, but should be refined as the project progresses. Likewise, high-level requirements may not be testable until they are refined in later phases of the project.

The requirements are divided into a number of categories to group the requirements in ways that will facilitate the design process. The requirements have been categorized as follows:

- Constraints – Identifies design constraints imposed by existing systems, standards, regulations, or hardware limitations.
- Data Requirements – Includes requirements pertaining to data, data structures, and databases for the system.
- Functional Requirements – Lists the characteristics that the software must support for each human interface. Identifies what is to be done by the product, what inputs should be transformed to what outputs, and what specific operations are required.
- Hardware Requirements – Provides a list of requirements for the system hardware, including network, power, air conditioning and other support hardware.
- Interface Requirements – Details physical and logical characteristics of the interfaces between the system and the rest of the world. Specifies communications interfaces and protocols that should be supported. Specifies user interface requirements.
- Lifecycle/End-of-Life Requirements – Lists Requirements for sustaining the system from implementation through disposal.
- Performance Requirements – Specifies static and dynamic capacity for number of users, connections, and other performance related factors.
- Quality Characteristics – Provides requirements which address the general quality, usability, extensibility, flexibility, and maintainability of the system.
- Security Requirements – Includes requirements related to both the facility that houses the system and operational security. Security requirements might specify the security and privacy requirements, including access limitations to the system, such as existence of log-on procedures and passwords, and of data protection and recovery methods.
- Training Requirements – Lists requirements for training, system documentation, system help files, and other documents and features required for users to operate and maintain the system.
- External Requirements – Includes requirements for policies and procedures to support the implementation, operations, training, and institutional requirements to support the system.

Table 3 shows the general layout of the requirements tables, and explains the purpose or content of each column of the requirements table. The requirements in this document are

a subset of the requirements information that is tracked in the system “Requirements Matrix”. Subsequent requirements documents will add detailed requirements, and other tracked information to the Requirements Matrix.

Table 3 - Explanation of the Requirements

ID	Requirement	Source	Comment
The requirement identifier (ID) is a unique identifier used to trace requirements from beginning to end in a system development process.	This column in the table contains the text of the actual requirement.	In this column we list the source(s) of each requirement, either by listing a reference document and section or identifying a “parent” requirement.	This column includes previous wordings or wording changes to the requirement, explanations and qualifications of the requirement, and notes regarding potential changes to the requirement.

Table 4 shows an explanation of the requirement identification numbering system.

Table 4 - Requirement ID Format

Requirement ID Format	Explanation of Format
XY-NNN	<p>X – Represents the classification of the requirements within the requirements document. The following classifications have been used in this requirements specification:</p> <ul style="list-style-type: none"> F – Functional Requirements (Section 3.1) H – Hardware Physical Requirements (Section 3.2) P – Performance Requirements (Section 3.3) S – Security Requirements (Section 3.4) D – Data Requirements (Section 3.5) Q – Quality Requirements (Section 3.6) T – Training Requirements (Section 3.6) X – External Requirements (Section 3.7) C – Constraints (Section 3.7) L – Lifecycle/End-of-Life Requirements (Section 3.8) I – Interface Requirements (Section 3.9) <p>Y - represents the allocation of a requirement to one of the following component classes:</p> <ul style="list-style-type: none"> R – Roadside Equipment O – On-board Equipment S – CICAS-V System <p>NNN – represents the sequence number within a classification. The sequence number makes each requirement ID unique. Numbering need not be sequential, and requirements may be grouped by number based on common relationships.</p>

3.1 Functional Capabilities

Requirements for system functions include actions performed by the system including external actions and data processing. Functions can be allocated to the system as a whole, or to sub-systems or components of the system. The RSE and OBE components have requirements relating to each of the following modes:

- Startup/Validation Mode
- Normal Operation Mode
- Maintenance Mode
- Failure Mode

3.1.1 FO – OBE Functional Requirements

No Validation Mode or Maintenance Mode requirements were identified for the OBE in the Concept of Operations.

3.1.1.1 FO – OBE Normal Operation Mode Requirements

Unless repeated elsewhere, these requirements only apply to the system while it is functioning in the Normal Operation Mode.

ID	Requirement	Source	Comment
FO-100	The OBE components shall process each incoming message to: <ul style="list-style-type: none"> • Authenticate messages • Validate message content • Error check messages • Error correct messages 	ConOps 4	Note: “error correction” will consist of waiting for corrected data.
FO-105	The OBE components shall perform periodic diagnostic self-testing while in the Normal Operation Mode.	ConOps 4	
FO-110	The OBE components shall transition into Failure Mode if the diagnostic self-testing detects a failure.	ConOps 4	
FO-115	The OBE components shall include diagnostic monitoring that detects and reports the consistent inability of the OBE components to establish valid vehicle positioning at intersections.	ConOps 7.3.2	
FO-200	The OBE components shall process service announcement messages when they are received and store the data for later use.	ConOps 5.2.2	
FO-201	The OBE components shall send a diagnostic message to the RSE components if the service announcement message indicates the RSE components are operational and the OBE components have error data from the OBE self-testing activities.	ConOps 5.2.2	Requirement deferred

ID	Requirement	Source	Comment
FO-210	The OBE components shall log a communication error including the time, date, vehicle location, and error message each time it is determined that the service announcement message is not being received when other RSE component message are being received.	ConOps 7.3.3	Requirement deferred
FO-212	The OBE components shall log a communication error including the time, date, vehicle location, and error message each time it is determined that broadcast from an RSE was expected, but not received.	PDR	Requirement deferred
FO-215	The OBE components shall process signal data messages when they are received and store the data for later use.	ConOps 5.2.2	Requirement deferred
FO-220	The OBE components shall process weather data messages when they are received and store the data for later use.	ConOps 5.2.2	Requirement deferred
FO-225	The OBE components shall process GID data messages when they are received and store the data for later use.	ConOps 5.2.2	
FO-230	The OBE components shall compare the RSE GID data with the OBE GID data and if the RSE GID data is newer than the current OBE GID data, the OBE components shall update the OBE GID data with the RSE GID data.	ConOps 5.2.2	
FO-235	The OBE components shall compare the RSE GID data with the OBE GID data and if current OBE data does not include the GID data for the intersection the OBE components shall add the RSE GID data to the OBE GID data.	ConOps 5.2.2	
FO-240	The OBE components shall process positioning correction messages when they are received and store the data for later use.	ConOps 5.2.2	
FO-245	The OBE components shall process area geospatial messages when they are received.	ConOps 5.2.2	Requirement deferred

ID	Requirement	Source	Comment
FO-250	The OBE components shall compare the RSE area geospatial data with the OBE area geospatial data and if the RSE area geospatial data is newer than the current OBE area geospatial data, the OBE components shall acquire an area geospatial data update from the RSE components.	ConOps 5.2.2	Requirement deferred
FO-255	The OBE components shall compare the RSE area geospatial data with the OBE area geospatial data and if current OBE data does not include the area geospatial data for the current vehicle location, the OBE components shall acquire an area geospatial data update from the RSE components.	ConOps 5.2.2	Requirement deferred
FO-260	The OBE components shall process area geospatial update data as it is received and store the data for later use.	ConOps 5.2.2	Requirement deferred
FO-265	The OBE components shall process GID update data as it is received and store the data for later use.	ConOps 5.2.2	Requirement deferred
FO-270	The OBE components shall periodically obtain vehicle status data from the Vehicle Control Systems.	ConOps 5.2.2	
FO-275	The OBE components shall process vehicle status data from the Vehicle Control Systems and store the data for later use.	ConOps 5.2.2	
FO-280	The OBE components shall periodically obtain vehicle location data from the Positioning System.	ConOps 5.2.2	
FO-285	The OBE components shall process the vehicle location data and store the data for later use.	ConOps 5.2.2	
FO-300	The OBE components shall decode the intersection GID and perform geospatial matching to locate the vehicle relative to the upcoming intersection.	ConOps 5.2.2	
FO-305	The OBE components shall use the positioning correction data to correct the vehicle positioning calculation when current positioning correction data is available.	ConOps 7.2.1.1	
FO-310	The OBE components shall determine the road currently occupied by the vehicle if the accuracy of the positioning data allows.	ConOps 7.2.1.1	

ID	Requirement	Source	Comment
FO-315	The OBE components shall determine the lane currently occupied by the vehicle if the accuracy of the positioning data allows.	ConOps 7.2.1.1	
FO-320	The OBE components shall provide an indication to the driver if it is determined that the vehicle is approaching a CICAS-V intersection.	ConOps 3.2.4 ConOps 5.2.2	
FO-325	The OBE components shall determine whether the intersection approach is controlled by a stop sign or a traffic signal.	ConOps 5.2.2	
FO-330	The OBE components shall determine that a stop is required if the current intersection approach is controlled by a stop sign.	ConOps 3.2.4 ConOps 4 ConOps 5.2.2	
FO-335	The OBE components shall determine that a stop is required if the intersection approach is controlled by a traffic signal and the signal status and timing indicate that the signal for the vehicle's lane will be red at the calculated time for the vehicle reaching the stop line.	ConOps 3.2.4 ConOps 4 ConOps 5.2.2	
FO-340	The OBE components shall determine that a stop is not required if the intersection approach is controlled by a traffic signal and the OBE components have determined that the signal for the vehicle's lane will not be red at the calculated time for the vehicle reaching the stop line.	ConOps 4 ConOps 5.2.2 PDR	In the normal case where a vehicle is approaching an intersection as the signal progresses from green to yellow to red, this determination will be an adequate basis for determining whether to warn the driver. However, this would not provide warning in the case where the driver is approaching the signal in the red phase, in anticipation of the next green phase, at a speed that would not allow the vehicle to stop in time if the red phase were extended by a transit priority or emergency preemption request. At such time as the signal phase was extended, a warning would be issued, but not necessarily in time for the vehicle to stop at the stop line. As such, signal prioritization and preemption do not affect this requirement itself—that is, a stop is still not required unless the signal will be red when the vehicle arrives at the stop line—but could have implications for the way that prioritization and preemption are used at a CICAS-V equipped intersection.

ID	Requirement	Source	Comment
FO-350	The OBE components shall calculate the time the vehicle will reach the intersection stop line based on the current vehicle location, stop line location, vehicle speed, and vehicle deceleration.	ConOps 5.2.2	
FO-355	The OBE components shall correct the calculated time at which the vehicle will reach the stop line for any difference between the location system time and the vehicle system time.	ConOps 5.2.2 PDR	
FO-360	The OBE components shall not determine that a stop is required if the intersection approach is not controlled by a traffic signal or stop sign.	ConOps 5.2.2	
FO-365	The OBE components shall calculate the current vehicle stopping distance based on current speed, and current rate of deceleration.	ConOps 5.2.2	
FO-370	The OBE components shall calculate the current distance from the vehicle to the intersection stop line.	ConOps 5.2.2	
FO-375	The OBE components shall determine that a Driver Warning is required when the vehicle is within the approach to an intersection, and it has been determined that a stop is required, and the current vehicle stopping distance exceeds the current distance to the stop line.	ConOps 3.2.4 ConOps 4 ConOps 5.2.2	
FO-380	The OBE components shall deactivate the DVI Driver Warning if the vehicle speed is below the minimum speed threshold given by the warning algorithm.	ConOps 4	
FO-385	The OBE components shall deactivate the DVI Driver Warning if the vehicle is within 3 meters of the intersection stop line.	ConOps 4 ConOps 5.2.2	Requirement deferred
FO-386	The OBE components shall deactivate the DVI Driver Warning if the vehicle has passed the stop line.	ConOps 4 ConOps 5.2.2	Eliminates false alarm if vehicle is in intersection and light turns red.
FO-390	The OBE component shall deactivate the DVI Driver Warning while deceleration is greater than the deceleration threshold value.	ConOps 4 ConOps 5.2.2 PDR	The deceleration threshold value will be set in the OBE performance specification.

ID	Requirement	Source	Comment
FO-395	The OBE components shall activate the DVI Driver Warning if it has been determined that a driver warning is required and no other condition has caused the Driver Warning to be deactivated.	ConOps 3.2.4 ConOps 4	
FO-400	The OBE components shall forward to the RSE at signalized intersections the following vehicle status information each time a Driver Warning is sent to the driver: <ul style="list-style-type: none"> • Time • Date • Vehicle Location • Vehicle Status data 	ConOps 5.2.2 PDR	Requirement deferred.

3.1.1.2 FO – OBE Failure Mode Requirements

ID	Requirement	Source	Comment
FO-900	The OBE components shall perform startup self-testing to verify that the OBE is functioning properly each time the system is powered-up.	ConOps 4	
FO-905	The OBE components shall transition into Failure Mode if the startup test detects a failure.	ConOps 4	
FO-910	The OBE components shall disable the DVI Driver Warning functionality if the OBE components go into Failure Mode.	ConOps 4	
FO-915	The OBE components shall notify the driver that the system has been disabled if the OBE components go into Failure Mode.	ConOps 4	
FO-920	The OBE components shall store the current time, date, error message, and vehicle location in the vehicle status data if the OBE components go into Failure Mode.	ConOps 5.2.2	

3.1.2 FR – RSE Functional Requirements

3.1.2.1 FR – RSE Startup/Validation Mode Requirements

The RSE components will startup automatically when power is supplied, and the RSE components will perform a self-test upon power-up. After successful completion of the self-test, the system goes into Normal Operation Mode.

When validation of the intersection is performed, the maintenance staff will place the RSE in Validation Mode. While in Validation Mode, maintenance vehicles traversing the intersection will provide feedback and information to the intersection. The CICAS-V

system can correlate this data with its internal information to validate that the system is performing as expected. After validation has been completed, the maintenance staff will place the RSE back in Normal Operation Mode.

The following requirements apply to the RSE during Startup Mode.

ID	Requirement	Source	Comment
FR-050	The RSE components shall perform startup self-testing upon power-up.	ConOps 4	
FR-055	The RSE components shall go into Failure Mode if the startup test detects an error condition.	ConOps 4	
FR-060	The RSE Components shall go into Normal Operation Mode if the RSE components pass the startup test.	ConOps 7.1	

The following requirements apply to the RSE while it is operating in Validation Mode.

ID	Requirement	Source	Comment
FR-300	The RSE components shall receive messages from maintenance vehicles and record the message data while the RSE components are in Validation Mode.	ConOps 7.1	
FR-305	The RSE components shall periodically broadcast a CICAS-V service announcement message to the OBE components.	ConOps 7.1	
FR-310	The RSE components shall broadcast a service announcement message which indicates that the intersection is in Validation Mode.	ConOps 7.1	See: PR-100
FR-315	The RSE components shall compare the data from maintenance vehicles with internal data to validate that the system is performing as expected.	ConOps 7.1	Requirement deferred.
FR-320	The RSE components shall create a control map of the intersection using the validation data received from the maintenance trucks.	ConOps 7.1	Requirement deferred.
FR-325	The RSE components shall create a control map of the intersection which correlates movement of vehicles through the intersection with data from the traffic signal controller assembly as to which lights are active.	ConOps 7.1	Requirement deferred.
FR-330	The RSE components shall create a coverage map of the intersection using the validation data received from the maintenance trucks.	ConOps 7.1	Requirement deferred.

ID	Requirement	Source	Comment
FR-335	The RSE components shall create a coverage map of the intersection which correlates movement of vehicles through the intersection with signal quality data from the maintenance trucks.	ConOps 7.1	Requirement deferred.
FR-340	The RSE components shall monitor lane level movement of vehicles to validate whether the GID is correct.	ConOps 7.1	Requirement deferred.
FR-345	The RSE components shall periodically broadcast signal data messages to the OBE components.	ConOps 5.2.1.2	See: PR-105
FR-350	The RSE components shall periodically obtain intersection signal data from the traffic control assembly if the RSE components are configured for a signalized intersection.	ConOps 4 ConOps 5.2.1.2	See: PR-100

3.1.2.2 FR – RSE Normal Operation Mode Requirements

Unless repeated elsewhere, these requirements only apply to the system while it is functioning in the Normal Operation Mode.

ID	Requirement	Source	Comment
FR-105	The RSE components shall perform periodic diagnostic self-testing.	ConOps 4	
FR-110	The RSE components shall transition into Failure Mode if the diagnostic self-testing detects an uncorrectable failure.	ConOps 4 ConOps 7.4	
FR-115	The RSE components shall transition the Traffic Signal Interface to Failure Mode if the RSE components do not receive a valid message or response from the traffic signal controller assembly for 15 seconds.	ConOps 4	Specified time-out time may need to be adjusted based on other design considerations.
FR-200	The RSE components shall periodically broadcast a service announcement message to the OBE components.	ConOps 5.2.1.1	See: PR-100.
FR-205	The RSE components shall periodically broadcast signal data messages to the OBE components.	ConOps 5.2.1.2	See: PR-105.
FR-210	The RSE components shall periodically obtain intersection signal data from the traffic control assembly if the RSE components are configured for a signalized intersection.	ConOps 4 ConOps 5.2.1.2	See: PR-100.

ID	Requirement	Source	Comment
FR-215	The RSE components shall periodically broadcast weather data messages to the OBE components.	ConOps 5.2.1.1	See: PR-115. Requirement deferred.
FR-220	The RSE components shall periodically broadcast intersection GID messages to the OBE components.	ConOps 5.2.1.1	See: PR-120.
FR-225	The RSE components shall periodically broadcast positioning correction messages to the OBE components.	ConOps 5.2.1.1	See: PR-125.
FR-235	The RSE components shall periodically broadcast area geospatial data messages to the OBE components.	ConOps 5.2.1.1	See: PR-130.
FR-600	The RSE components shall receive, process, and store vehicle status data received from vehicles.	ConOps 5.2.1.1	Requirement deferred.
FR-605	The RSE components shall transfer vehicle status data to other systems upon receiving a validated request for the vehicle status data.	ConOps 5.2.1.1 PDR	Requirement deferred.

3.1.2.3 FR – RSE Maintenance Mode Requirements

The functional schematic for the Diagnostic/Maintenance Mode is shown in Figure 6. The Maintenance User Interface must provide access to RSE components remotely and locally. Remote access will be through a network connection to the VII Network which may support access by traffic operations centers and other service providers.

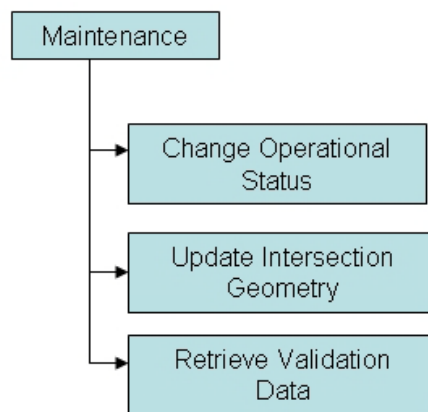


Figure 6 - CICAS-V Functional Schematic (Maintenance Mode)

Maintenance users must be able to change the CICAS-V operation state. This includes making the intersection inactive or placing it into Validation Mode. Maintenance users must be able to retrieve validation results and error reporting data.

Maintenance users must be able to make changes to the intersection geometry.

ID	Requirement	Source	Comment
FR-400	The RSE components' Maintenance User Interface shall include provisions for setting the RSE mode to Normal Operation, Maintenance, and Validation modes.	ConOps 7.1	Requirement Deferred per phone conference and CDR
FR-405	The RSE components' Maintenance User Interface shall include provisions for retrieving validation results and data.	ConOps 7.1	Requirement Deferred per phone conference and CDR
FR-410	The RSE components' Maintenance User Interface shall include provisions for making changes to the CICAS-V intersection geometry data.	ConOps 7.1	Requirement Deferred per phone conference and CDR

3.1.2.4 FR – RSE Failure Mode Requirements

The RSE components must not provide information to vehicles until the system has been diagnosed and returned to Normal Operation Mode.

ID	Requirement	Source	Comment
FR-500	The RSE components shall not transmit any messages other than the service announcement messages to the OBE components while in Failure Mode.	ConOps 7.4	
FR-510	The RSE components shall store the current time, date, and error message in the RSE status data if the RSE components go into Failure Mode.	ConOps 4	
FR-515	The RSE components shall send the Failure Mode status data to the owner/operator of that RSE installation if the RSE components go into Failure Mode.	ConOps 4 PDR	Requirement deferred.
FR-520	The RSE components shall stop broadcasting signal data messages and shall broadcast service announcement messages which indicate that the CICAS-V capability is not operational if the Traffic Signal Interface is in Failure Mode.	ConOps 5.2.1.1	
FR-525	The RSE components shall transition the Traffic Signal Interface to Normal Operation Mode if the RSE components receive two consecutive valid messages from the traffic signal controller assembly.	ConOps 4	

3.2 Physical Requirements

Physical requirements relate to the construction, durability, adaptability of the product and the environmental conditions under which the system is expected to operate.

3.2.1 HO – OBE Hardware Physical Requirements

ID	Requirement	Source	Comment
HO-100	The OBE components shall be able to generate a warning of potential impending violation through the DVI.	ConOps 3.2.4 ConOps 4	
HO-105	The OBE components shall be able to notify the driver that the CICAS-V system is not operating properly through the DVI.	ConOps 3.2.4	
HO-200	The OBE components shall work with light vehicles.	ConOps 4	
HO-205	The OBE components shall interface with the current VII vehicle architecture.	ConOps 1.6.6	A reference for an applicable interface standard is needed here.
HO-210	The OBE components shall interface with the current VII radio communication system defined by the WAVE radio standards defined in IEEE 802.11p, and IEEE 1609.x.	ConOps 1.6.5	
HO-215	The OBE components shall function in all roadway weather and lighting conditions.	ConOps 4	
HO-220	<p>The OBE hardware components shall include the following items as a minimum:</p> <ul style="list-style-type: none"> • WAVE radio assembly capable of broadcasting and receiving at 5.9 GHz. • A CICAS-V Vehicle Applications Processor • A device capable of storing the data required for OBE component functions • A positioning system, including a location processor, of specified accuracy and precision • A Driver-Vehicle Interface • A Vehicle Systems Interface • An On-board Interface to the WAVE radio assembly • Other vehicle sensors with an interface to the CICAS-V application processor 	ConOps 6.2.3	

3.2.2 HR – RSE Hardware Physical Requirements

ID	Requirement	Source	Comment
HR-100	The RSE components shall include one port for backhaul network access and one port for local maintenance access.	PDR	
HR-200	The RSE components shall interface with the current VII roadside architecture.	ConOps 1.6.3	
HR-205	The RSE components shall interface with the current VII radio communication system defined by the WAVE radio standards defined in IEEE 802.11p, and IEEE 1609.x.	ConOps 1.6.6	
HR-210	The RSE components shall operate normally under the following environmental conditions: <ul style="list-style-type: none"> • Temperature between -34 C and +74 C • Relative Humidity between 5% and 95% non-condensing • Shock per MIL-STD-810E, Method 516.4 • Vibration per MIL-STD-810E, Method 514.4, equipment class G 		
HR-215	The RSE components shall operate normally when powered from sources meeting the following power conditions: <ul style="list-style-type: none"> • Line voltage 89 to 135 VAC • Line frequency 60.0 +/- 3.0 Hz 		
HR-220		ConOps 6.2.1 PDR	Requirement deprecated and replaced by HR-221, HR-222, HR-223, HR-224, and HR-225.
HR-221	The RSE hardware components shall include a WAVE radio assembly capable of broadcasting and receiving at 5.9 GHz.	ConOps 6.2.1 PDR	
HR-222	The RSE hardware components include a CICAS-V Roadside Applications Processor.	ConOps 6.2.1 PDR	
HR-223	The RSE hardware components include a device capable of storing the data required for RSE component functions.	ConOps 6.2.1 PDR	
HR-224	The RSE hardware components shall include a service capable of producing positioning corrections.	ConOps 6.2.1 PDR	
HR-225	The RSE hardware components shall include an interface to the roadside network.	ConOps 6.2.1 PDR	

System Performance Characteristics

Performance requirements are used to highlight the critical performance conditions and their associated capabilities.

3.2.3 PO – OBE Performance Requirements

ID	Requirement	Source	Comment
PO-100	The OBE components shall perform the situation assessment at a configurable interval between 50 and 1000 milliseconds.	ConOps 5.2.2	Rate may need to be modified based on testing or other design factors.
PO-105	The OBE components shall obtain the vehicle status data from the Vehicle Control Systems at a configurable interval between 50 and 1000 milliseconds.	ConOps 5.2.2	Rate may need to be modified based on testing or other design factors.
PO-110	The OBE components shall obtain the vehicle location data from the positioning system at a configurable interval between 50 and 500 milliseconds.	ConOps 5.2.2	
PO-200	The OBE components shall receive and process all messages from the RSE components within 100 milliseconds of receiving the complete message.	ConOps 4	Time may need to be modified based on testing or other design factors.

3.2.4 PR – RSE Performance Requirements

ID	Requirement	Source	Comment
PR-100	The RSE components shall obtain signal data from the Traffic Signal Interface within 100 milliseconds of that data being available at that interface.	ConOps 5.2.1.2 PDR	See: FR-210 Rate may need to be modified based on testing or other design factors.
PR-105	The RSE components shall broadcast the intersection signal data at a configurable interval between 50 and 1000 milliseconds.	ConOps 5.2.1.2	See: FR-205 Rate may need to be modified based on testing or other design factors.
PR-110	The RSE components shall periodically broadcast the service announcement message based on the schedule in the RSE component configuration data.	ConOps 5.2.1.1	See: FR-310, FR-200 The broadcast schedule may need to be configured differently based on intersection characteristics.
PR-115	The RSE components shall periodically broadcast the weather data message based on the schedule in the RSE component configuration data.	ConOps 5.2.1.1	See: FR-215 The broadcast schedule may need to be configured differently based on intersection characteristics. Requirement Deferred

ID	Requirement	Source	Comment
PR-120	The RSE components shall periodically broadcast Intersection GID messages based on the schedule in the RSE component configuration data.	ConOps 5.2.1.1	See: FR-220 The broadcast schedule may need to be configured differently based on intersection characteristics.
PR-125	The RSE components shall periodically broadcast positioning correction messages based on the schedule in the RSE component configuration data.	ConOps 5.2.1.1	See: FR-225 The broadcast schedule may need to be configured differently based on intersection characteristics.
PR-130	The RSE components shall periodically broadcast area geospatial data messages based on the schedule in the RSE component configuration data.	ConOps 5.2.1.1	See: FR-235 The broadcast schedule may need to be configured differently based on intersection characteristics.
PR-200	The RSE components shall receive, process, store, and transmit all signal timing and status data within 100 milliseconds of receiving the data from the traffic controller assembly.	ConOps 4 ConOps 5.2.1.1 PDR	Rate may need to be modified based on testing or other design factors.

3.3 System Security

System security requirements may be related to both the facility that houses the system and operational security. These requirements include the factors that would protect the system from accidental or malicious access, use, modification, destruction, or disclosure.

3.3.1 SO – OBE Security Requirements

ID	Requirement	Source	Comment
SO-100	The OBE components shall include a secure operating system meeting the requirements of FIPS 140-2 for operating system security.	ConOps 4 ConOps 6.4.1	Federal Information Processing Standard (FIPS) 140-2 is referenced in the VII Proof of Concept requirements.

3.3.2 SR – RSE Security Requirements

ID	Requirement	Source	Comment
SR-100	The RSE components shall include sufficient access security to limit electronic access of RSE components to authorized users.	ConOps 4	
SR-105	The RSE components shall include sufficient access security to allow owners/operators of the components to know that unauthorized access has been attempted.	ConOps 4	
SR-110	The RSE components shall include a secure operating system meeting the requirements of FIPS 140-2 for operating system security.	ConOps 4 ConOps 6.4.2	FIPS 140-2 is referenced in the VII Proof of Concept requirements.

3.4 Information Management

Information management requirements address requirements for data, data structures, databases, and management of data during system operation.

3.4.1 DO – OBE Data Requirements

ID	Requirement	Source	Comment
DO-100	The OBE components shall include data elements for time and date for all OBE data records.	ConOps 4 ConOps 5.2.2	
DO-200	The OBE components shall include data elements for the time, date, vehicle speed, vehicle deceleration, and vehicle location for the last instance that the DVI warning was triggered.	ConOps 5.2.2	
DO-205	The OBE components shall include data elements for positioning correction data received from the RSE.	ConOps 5.2.2 PDR	
DO-210	The OBE components shall include data elements for the time, date, error message, and vehicle location for the last instance that the OBE components were disabled due to error checking.	ConOps 5.2.2	
DO-300	The OBE components shall use GID data which shall include standard globally referenced coordinates.	ConOps 5.2.2	
DO-305	The OBE components shall include data elements to describe all approach lanes for an intersection.	ConOps 4	
DO-310	The OBE components shall include data elements for the location of intersection approach lanes and stop lines for all traffic control approaches.	ConOps 4 ConOps 5.2.2	
DO-315	The OBE components shall include data elements for relating lanes in the GID data to lanes in the traffic signal data.	ConOps 5.2.2	
DO-320	The OBE components shall include data elements for the current vehicle location.	ConOps 5.2.2	
DO-325	The OBE components shall include data elements for the GID data and area geospatial data.	ConOps 5.2.2	
DO-330	The OBE components shall include data elements for the vehicle status data.	ConOps 5.1.4 ConOps 5.2.2	
DO-335	The OBE components shall include data elements for the positioning correction data.	ConOps 5.2.2	

ID	Requirement	Source	Comment
DO-340	The OBE components shall include data elements for the weather data.	ConOps 5.2.2	Requirement deferred
DO-345	The OBE components shall include data elements for the vehicle diagnostic and error message data.	ConOps 5.2.2	
DO-350	The OBE components shall include data elements for the traffic signal data.	ConOps 5.2.2	

3.4.2 DR – RSE Data Requirements

ID	Requirement	Source	Comment
DR-100	The RSE components shall include data elements for time and date for all RSE data records.	ConOps 4	
DR-200	The RSE components shall include data elements for traffic signal states and traffic signal timing for each lane at a signalized intersection.	ConOps 4	This has applications in traffic signal adaptation.
DR-205	The RSE components shall include data elements for relating lanes in the GID data to lanes in the traffic signal data.	ConOps 4 ConOps 5.2.2	
DR-210	The RSE components shall include data elements for the current vehicle location at the time of a warning.	ConOps 5.2.2	Requirement deferred.
DR-215	The RSE components shall include data elements for the GID data and area geospatial data.	ConOps 5.2.2	
DR-220	The RSE components shall include data elements for the vehicle status data.	ConOps 5.1.4	Requirement deferred.
DR-225	The RSE components shall include data elements for the positioning correction data.	ConOps 5.2.2	
DR-230	The RSE components shall include data elements for the weather data.	ConOps 5.2.2	Requirement deferred.
DR-235	The RSE components shall include data elements for the vehicle diagnostic and error message data.	ConOps 5.2.2	Requirement deferred. These data elements are required to support receiving messages from vehicles to collect OBE diagnostic and error messages and report them to the operations center.
DR-245	The RSE components shall include data elements for the RSE configuration data.	ConOps 5.2.2	
DR-250	The RSE components shall include data elements for the intersection validation data.	ConOps 5.2.2	
DR-255	The RSE components shall use GID data which shall include standard globally referenced coordinates.	ConOps 4	

ID	Requirement	Source	Comment
DR-260	The RSE components shall include data elements to describe all approach lanes for an intersection.	ConOps 4	
DR-265	The RSE components shall include data elements for the location of intersection approach lanes and stop lines for all traffic control approaches.	ConOps 4 ConOps 5.2.2	

3.5 System Operations – Quality, Training, and Documentation Requirements

System qualities include quality of workmanship, system component reliability, system availability, software portability, and system support. System support includes training, documentation, installation/startup services, maintenance services, and help desk services.

3.5.1 QO – OBE Quality Requirements

ID	Requirement	Source	Comment
QO-100	The OBE components shall support backwards compatibility with previous versions of the OBE components	ConOps 4	Requirement deferred
QO-105	The OBE hardware components, taken as a unit, shall have a Mean Time Between Failure of 20,000 hours or better.	ConOps 4 PDR	

3.5.2 QR – RSE Quality Requirements

ID	Requirement	Source	Comment
QR-100	The RSE components shall support backwards compatibility with previous versions of the RSE components.	ConOps 4	Requirement deferred
QR-105	The RSE hardware components, taken as a unit, shall have a Mean Time Between Failure of 100,000 hours or better.	ConOps 4 PDR	

3.5.3 TO – OBE Training and Documentation Requirements

ID	Requirement	Source	Comment
TO-100	The OBE components shall include maintenance and diagnostic instructions for automotive maintenance providers.	ConOps 6.6.1.3	Requirement deferred

3.5.4 TR – RSE Training and Documentation Requirements

ID	Requirement	Source	Comment
TR-100	The RSE components shall include a Training Plan which addresses initial training and continuing education.	ConOps 6.7.2 PDR	Requirement deferred
TR-105	The RSE components shall include training materials addressing the deployment and maintenance of the RSE components.	ConOps 6.7.2	Requirement deferred

ID	Requirement	Source	Comment
TR-110	The RSE components shall include maintenance and diagnostic instructions for state and local DOTs.	ConOps 6.6.2.5	Requirement deferred

3.6 External Requirements

This section addresses requirements that are imposed on the system by external factors. The requirements include functions and components of the system that are external to the CICAS-V system, but required for operation of the system. The requirements detail any relevant organizational policies that will affect the operation or performance of the system as well as any relevant external regulatory requirements, or constraints imposed on the design of the system.

By their nature, external requirements are not usually testable. Verification that a system meets these requirements usually requires inspection, calculation, or other verification methods that can ascertain whether the requirement has been met. Requirements on components that are truly external to the specified system can not be used as acceptance testing criteria because they are outside the control boundaries of the project.

3.6.1 XO – OBE External Requirements

ID	Requirement	Source	Comment
XO-100	The vehicle positioning equipment shall provide vehicle location data with an absolute accuracy of 1 meter or better at 95% confidence.	ConOps 4 PDR	Lane width in the US ranges from 2.6 m to 4.5 m with a nominal value of 3.66 m.

3.6.2 XR – RSE External Requirements

ID	Requirement	Source	Comment
XR-100	The WAVE Radio System range shall be great enough that the Situation Assessment algorithm has sufficient time to perform situational assessment and DVI activation when vehicles are traveling at up to 120% of legal speeds.	ConOps 5.2.1.1 PDR	The range of the WAVE Radio System has been shown to be at least 300 meters with a packet error rate of less than 70%. Propagation factors such as buildings, trees, or other obstructions may further limit communication range. These limitations are not within the control of the CICAS-V design effort.
XR-105	The WAVE Radio System latency shall be small enough that the Situation Assessment algorithm has sufficient time to perform situational assessment and DVI activation when vehicles are traveling at legal speeds.	ConOps 4	
XR-110	The WAVE Radio System shall provide secure messaging.	ConOps 4	
XR-111	The WAVE Radio System shall provide a mechanism for message authentication.	ConOps 4	
XR-115	The RSE shall be housed in an enclosure meeting the physical security requirements of the agency which owns the RSE.	ConOps 4	

ID	Requirement	Source	Comment
XR-120	The RSE components shall be provided with suitable power, environmental conditioning, and lightning protection.	ConOps 6.2.1	
XR-125	CICAS-V equipped signalized intersections shall include the following support components: <ul style="list-style-type: none"> • A data-accessible traffic signal controller assembly • A sensor to provide signal phase change information if this information is not available from the traffic signal controller assembly • An interface to a traffic signal controller, conflict monitor, or a signal phase sensor. 	ConOps 6.2.2	
XR-130	The CICAS-V Management System components shall include the following CICAS-V System support components: <ul style="list-style-type: none"> • Secure, real-time operating systems • Computer systems to manage system upgrades and software downloads • Computers running the geographic information system software • Network routers • Network firewall hardware and software • Network monitoring hardware and software • Data connections to the RSE installations with sufficient bandwidth to accommodate communication traffic between the Management System and the RSE installations • Uninterruptible power supply protection for all Management System computers with a 15 minute protection capacity and surge protection • Environmentally controlled facility to house the equipment 	ConOps 6.3 ConOps 6.4.3	

3.6.3 XS – External Requirements on CICAS-V System Maintenance Vehicles

While in Validation Mode, maintenance vehicles traversing the intersection will provide information to the roadside equipment. These requirements do not apply to the standard OBE components, but apply to the external support systems required for validation. A maintenance vehicle would not need to be a CICAS-V equipped vehicle to provide these support functions.

ID	Requirement	Source	Comment
XS-100	CICAS-V maintenance vehicles shall record their location, speed, direction, positioning errors, number of satellites, and other available validation parameters as they approach a CICAS-V equipped intersection.	ConOps 7.1	
XS-105	CICAS-V maintenance vehicles shall transmit their current location, speed, direction, positioning errors, number of satellites, and other available validation parameters to the CICAS-V intersection equipment.	ConOps 7.1	Requirement deferred.

3.6.4 CO – Constraints on the OBE Components Design

Constraints are requirements that are imposed on a system by outside factors beyond the control of the designer. These may include regulations, rules, laws, or other legal requirements. Constraints may include pre-existing conditions such as existing systems or system interfaces that must be supported. Constraints may also include design goals and arbitrary dictates which specify how one or more elements of the system must be designed.

By their nature, constraints are usually not presented in a testable form. Constraints are usually verified by some form of inspection of the system or component, or review of the design or support documentation.

ID	Requirement	Source	Comment
CO-100	The OBE components shall be compatible with the current VII architecture for signalized intersections.	ConOps 4	
CO-105	The OBE components shall use the current VII radio communication system for wireless communications between OBE and RSE components.	ConOps 4	

ID	Requirement	Source	Comment
CO-200	The OBE DVI components shall follow Human Factors guidelines issued by the Federal Highway Administration (FHWA) and the National Highway Traffic Safety Administration (NHTSA).	ConOps 4 PDR	For validation, this requirement may need to be refined to explicitly identify the relevant FHWA and NHTSA standards and guidelines, which could include: 1. Campbell, J.L. et al., <i>Human Factors Design Guidelines</i> 2. Lyons et al., <i>Preliminary Human Factors Guidelines for Crash Avoidance Warning Devices</i> 3. Green et al., <i>Preliminary Human Factors Design Guidelines for Driver Information Systems</i>
CO-205	The OBE DVI components shall use alerts that are effective and compatible with automotive human factors guidelines and each OEM's driver-vehicle interface principles and practices.	ConOps 4 ConOps 5.1.3 PDR	For validation, this requirement may need to be refined to explicitly identify the relevant automotive and OEM standards and guidelines.
CO-210	The OBE DVI components shall use alerts that are specifically identified with intersection collision avoidance.	ConOps 5.1.3 PDR	The intent of the requirement may be best expressed in terms of what the warning should do: be explicitly associated with collision avoidance. Potential negative consequences of the desired alert are considered in the applicable human factors guidelines.
CO-300	The OBE components' activation of the DVI driver alert shall be issued before it's too late for driver to react and stop.	ConOps 4	This may be defined as issuing the alert at time that allows a 90 th -percentile driver to bring the vehicle to a stop before entering the intersection crash box assuming vehicle decelerations not exceeding .5 g and reaction times not exceeding 2 sec. or so.
CO-305	The OBE components shall minimize false alarms.	ConOps 4 ConOps 5.1.3	For validation, this requirement may need to be refined to identify a statistical measure of the acceptable number of false alarms per X thousand alarms and a definition of what constitutes a "false" alarm.
CO-310	The OBE components shall minimize nuisance alarms.	ConOps 4 ConOps 5.1.3	
CO-315	The OBE components shall minimize missed violations.	ConOps 4	For validation, this requirement may need to be refined to identify a statistical measure of the acceptable number of missed violations per X thousand actual violations
CO-320	The OBE components design shall consider the full range of driver characteristics contributing to the effectiveness of the alert.	ConOps 4 PDR	This requirement may be a factor in the design of the warning algorithm and the DVI.

ID	Requirement	Source	Comment
CO-325	The OBE components shall be compatible with other collision avoidance systems in the vehicle.	ConOps 4	This will, for deployment, be verified by each OEM during development of a vehicle
CO-330	The OBE component design shall not preclude interoperability and integration with current in-vehicle safety systems, with other future VII enabled systems, and other future in-vehicle safety systems.	ConOps 4	This will presumably be verified by inspecting the design documents to determine that the design is open, non-proprietary, and extensible?
CO-335	The OBE components for the DVI shall meet affordability constraints.	ConOps 5.1.3	Requirement deferred.

3.6.5 CR – Constraints on the RSE Components Design

Constraints are a form of requirement that is imposed on a system by outside factors beyond the control of the designer. These may include regulations, rules, laws, or other legal requirements. Constraints may include pre-existing conditions such as existing systems or system interfaces that must be supported. Constraints may also include design goals and arbitrary dictates which specify how one or more elements of the system must be designed.

By their nature, constraints are usually not presented in a testable form. Constraints are usually verified by some form of inspection of the system or component, or review of the design or support documentation.

ID	Requirement	Source	Comment
CR-100	The RSE components shall be compatible with the current VII architecture for signalized intersections.	ConOps 5.1.1	
CR-105	The RSE components shall use the current VII radio communication system for wireless communications between RSE and OBE components.	ConOps 6.2	
CR-110	The RSE components shall work with transit signal priority and emergency vehicle signal preemption systems.	ConOps 4 PDR	Signal priority and preemption present a dynamic change in the signal timing plan
CR-115	The RSE components shall work with fixed, locally-actuated, and true adaptive signal timing.	ConOps 4 ConOps 5.2.1 PDR	

3.6.6 CS – Constraints on the CICAS-V System Design

ID	Requirement	Source	Comment
CS-100		ConOps 4 PDR	Requirement deprecated.
CS-105	The CICAS-V System shall be designed for a high degree of reliability and availability.	ConOps 4	Actual MTBF reliability and availability targets will be necessary for verification of this requirement.

3.7 System Lifecycle

This section contains requirements for sustaining the system from deployment through de-commissioning.

3.7.1 LO – OBE Lifecycle Requirements

ID	Requirement	Source	Comment
LO-100	The OBE components shall include procedures for testing and certifying both hardware and software upgrades before they are presented for deployment.	ConOps 6.7.3	
LO-105	The OBE components shall include procedures for national deployment of software upgrades.	ConOps 6.7.3	

3.7.2 LR – RSE Lifecycle Requirements

ID	Requirement	Source	Comment
LR-100	The RSE components shall include procedures for testing and certifying both hardware and software upgrades before they are presented for deployment.	ConOps 6.7.3	
LR-105	The RSE components shall include procedures for national deployment of software upgrades.	ConOps 6.7.3	

3.8 System Interfaces

This section includes the requirements for interfaces among different components and their external capabilities, including all its users, both human and other systems. The characteristics of interfaces to systems under development, or future systems, may also be included. Any known interdependencies or constraints associated with the interfaces are identified (e.g., communication protocols, special devices, standards, fixed formats).

3.8.1 IO – OBE Interface Requirements

ID	Requirement	Source	Comment
IO-100	The OBE components shall provide message validation, error detection, and error correction for all incoming messages from the RSE components.	ConOps 4	Note: “error correction” will consist of waiting for corrected data.
IO-105	The OBE components shall include communication authentication to verify authenticity of all incoming messages arriving through the On-board Interface.	ConOps 4	
IO-110	The OBE components shall acquire GID and area geospatial data updates using the service channel indicated by the service announcement message.	ConOps 5.2.2	Requirement deferred
IO-200	The OBE components shall acquire vehicle location data from the Positioning System.	ConOps 5.1.4	
IO-205	The OBE components shall acquire vehicle location data from the Positioning System via the vehicle system’s positioning component if the Positioning System is a Vehicle Control Systems component.	ConOps 5.1.4 PDR	
IO-300	The OBE components shall acquire service announcement messages via the On-board Interface	ConOps 5.2.2	
IO-305	The OBE components shall acquire GID messages and GID update messages via the On-board Interface.	ConOps 5.2.2	
IO-310	The OBE components shall acquire area geospatial messages and area geospatial update messages via the On-board Interface	ConOps 5.2.2	Requirement deferred
IO-315	The OBE components shall acquire positioning correction messages via the On-board Interface if the Positioning system is part of the VII system.	ConOps 5.2.2	
IO-320	The OBE components shall acquire weather data messages via the On-board Interface	ConOps 5.2.2	Requirement deferred

ID	Requirement	Source	Comment
IO-325	The OBE components shall transmit vehicle status data to the RSE components via the On-board Interface.	ConOps 5.1.2	Requirement deferred
IO-330	The OBE components shall request GID and area geospatial data updates from the RSE components via the On-board Interface.	ConOps 5.1.2	
IO-400	The OBE components shall acquire vehicle status data from the Vehicle Control Systems via the Vehicle Systems Interface.	ConOps 5.1.4	
IO-405	The OBE components shall acquire vehicle status data including: <ul style="list-style-type: none"> • Vehicle Speed • Vehicle rate of deceleration • Vehicle braking indication 	ConOps 5.1.4	
IO-500	The OBE components shall issue Driver Warnings and notifications to the driver via the Driver-Vehicle Interface.	ConOps 5.1.3	

3.8.2 IR – RSE Interface Requirements

ID	Requirement	Source	Comment
IR-100	The RSE components shall provide message validation, error detection, and error correction for all messages received from the OBE components.		Requirement deferred.
IR-105	The RSE components shall include communication authentication to verify authenticity of all incoming messages arriving through the Roadside Interface.	ConOps 4	Requirement deferred
IR-200	The RSE components shall acquire intersection signal status, signal state, and signal timing data from the Traffic Signal Interface.	ConOps 5.1.5	
IR-205	The RSE components shall send warning status messages to the traffic signal controller via the Traffic Signal Interface	ConOps 5.1.5	Requirement deferred
IR-300	The RSE components shall broadcast service announcement messages via the Roadside Interface.	ConOps 5.1.1	

ID	Requirement	Source	Comment
IR-305	<p>The RSE components shall broadcast service announcement messages which include:</p> <ul style="list-style-type: none"> • Intersection identification code • Indication of whether the CICAS-V capability is operational • Indication of whether GID and geospatial data is available • Version number of the GID data • Version number of the geospatial data • Channel on which the GID and geospatial data can be downloaded 	ConOps 5.2.1.1	
IR-310	<p>The RSE components shall broadcast signal data messages via the Roadside Interface.</p>	ConOps 5.2.1.2	
IR-315	<p>The RSE components shall broadcast signal data messages which include:</p> <ul style="list-style-type: none"> • Traffic signal state (red, yellow, or green) for each approach lane in the intersection • Traffic signal phase and timing data for each approach lane in the intersection • Lane identification for all approach lanes that corresponds to the GID lane identification • Predicted time before a change in signal state for each approach lane in the intersection if such data is available 	ConOps 5.2.1.2	
IR-320	<p>The RSE components shall periodically broadcast weather data messages to the OBE components via the Roadside Interface.</p>	ConOps 5.2.1.1	Requirement deferred
IR-325	<p>The RSE components shall broadcast weather data messages which include:</p> <ul style="list-style-type: none"> • Road surface coefficient of friction data if such data is available • Dew point data if such data is available • Temperature data if such data is available • Visibility data if such data is available • Rain data if such data is available • Snow data if such data is available 	ConOps 5.2.1.1	Requirement deferred

ID	Requirement	Source	Comment
IR-330	The RSE components shall broadcast GID data messages and GID data update messages via the Roadside Interface.	ConOps 5.2.1.1	
IR-335	The RSE components shall broadcast GID data messages which include: <ul style="list-style-type: none"> • GID version ID • Intersection ID • Road/lane geometry for all approach roads • Location of the intersection stop lines • Lane identification for all approach lanes that corresponds to the traffic signal lane identification • Geometry of any obstacles or dividers in the intersection box 	ConOps 5.2.1.1	
IR-340	The RSE components shall broadcast positioning correction messages via the Roadside Interface.	ConOps 5.2.1.1	
IR-345	The RSE components shall broadcast positioning correction messages which include positioning correction data that can be used to improve positioning accuracy.	ConOps 5.2.1.1	
IR-350	The RSE components shall broadcast area geospatial data messages and area geospatial data update messages via the Roadside Interface.	ConOps 5.2.1.1	Requirement deferred
IR-355	The RSE components shall broadcast area geospatial data messages which include: <ul style="list-style-type: none"> • Geospatial information version ID • Intersection ID and type for all CICAS-V intersections within a specified area • Intersection GID data for all CICAS-V controlled intersections within a specified area 	ConOps 5.2.1.1	Requirement deferred
IR-360	The RSE components shall receive GID data updates from the Maintenance User Interface via the Roadside Interface.	ConOps 5.1.1	
IR-365	The RSE components shall receive vehicle status data via the Roadside Interface.	ConOps 5.1.1	Requirement deferred
IR-370	The RSE components shall transmit RSE status, vehicle status, and system validation data to the Maintenance User Interface via the Roadside Interface.	ConOps 5.1.1	Requirement deferred

ID	Requirement	Source	Comment
IR-375	The RSE components shall receive positioning correction data via the Roadside Interface	ConOps 5.1.1 PDR	
IR-400	The RSE components shall broadcast messages to the OBE components using the radio channels indicated in the RSE configuration data for each message type.	ConOps 5.2.1	

Appendix A: List of Acronyms

ATIS	Advanced Traveler Information Systems
CAMP	Crash Avoidance Metrics Partnership
CICAS	Cooperative Intersection Collision Avoidance System
CICAS-V	Cooperative Intersection Collision Avoidance System for Violations
ConOps	Concept of Operations
CVO	Commercial Vehicle Operations
DOT	Department of Transportation
DSRC	Dedicated Short Range Communications
DVI	Driver-Vehicle Interface
FCC	Federal Communications Commission
FHWA	Federal Highway Administration
FIPS	Federal Information Processing Standard
FISMA	Federal Information Security Management Act
FOT	Field Operational Test
GHz	Gigahertz
GID	Geometric Intersection Description
Hz	Hertz
ID	Identification or Identifier
IEEE	Institute of Electrical and Electronics Engineers
ITS	Intelligent Transportation Systems
IVC	Intersection Violation Criteria
JPO	Joint Program Office
MTBF	Mean Time Between Failure
NHTSA	National Highway Traffic Safety Administration
OBE	On-board Equipment
OEM	Original Equipment Manufacturer
PDR	Preliminary Design Review
POC	Proof of Concept
RITA	Research and Innovative Technology Administration
RSE	Roadside Equipment
SAE	SAE International, an organization formerly known as Society of Automotive Engineers
SUV	Sports Utility Vehicle
USDOT	United States Department of Transportation
VAC	Volts – Alternating Current
VDC	Volts – Direct Current
VII	Vehicle Infrastructure Integration
VNTSC	Volpe National Transportation Systems Center
VSC2	Vehicle Safety Communications 2
VTTI	Virginia Tech Transportation Institute
WAVE	Wireless Access in Vehicular Environments
WSA	WAVE Service Announcement

Appendix B: Glossary of Terms

Component: One of the parts that make up a system. A component may be hardware, software, firmware, documentation, or other related artifact required to design, build, operate, maintain, or decommission a system over the life of the system.

Dedicated Short Range Communications (DSRC): DSRC or Dedicated Short Range Communications is a short to medium range wireless protocol operating in the licensed 5.9 GHz band and specifically designed for automotive use. It offers communication between the vehicle and roadside infrastructure.

Driver-Vehicle Interface (DVI): A device within the vehicle that communicates information to the driver or alerts the driver to a situation, such as a potential violation of a traffic control.

False Alarm: An indicated fault where no fault exists. A false negative is a situation when a traffic control violation warning should have been issued, but was not. A false positive is a situation where a traffic control violation warning was unnecessarily issued.

Geometric Intersection Description (GID): A digital representation of the geometry of the intersection that enables the vehicle to match itself to the correct approach road and to the correct approach lane on that approach road. It includes such information as the location of the stop line, a lane numbering scheme, the orientation of the intersection to north, a version number and possibly other additional features.

Geospatial Database: A database with geospatial information about CICAS-V intersections. The database contains information such as the intersection IDs for all the CICAS-V intersections within a defined area, intersection type IDs (signalized, stop sign controlled) the GIDs for all CICAS-V stop sign controlled intersections in the specified area, a version ID and other information that may become important in the future.

Intersection: For CICAS-V, an intersection is a junction of two or more public roads where at least one approach is controlled by either a stop sign or a traffic signal. The “intersection” in this context includes the approaches and exits from the junction.

Light Vehicles: The term “light vehicles” refers to passenger vehicles sold or operated legally within the U.S., including sedans, light trucks, and vans.

Roadside Equipment: A piece of equipment at the roadside or in the intersection that includes a WAVE radio and the software to operate that radio.

Stop line: Demarcated location on an approach to an intersection where a vehicle needs to stop for appropriate traffic control devices. The stop line location will be included in the geometric intersection description. For intersection approaches that do not have a stop line, an appropriate stopping location will be included in the geometric intersection description.

Traffic Signal Related Terms:

- **Traffic Signal Adaptation:** Traffic signal adaptation (TSA) is a term used within the CICAS program to describe any number of applications where traffic signal timing is adjusted in response to a DSRC message sent from a CICAS-equipped vehicle to the CICAS intersection RSE. An example of a specific TSA application would be to extend an all-red traffic signal interval at a CICAS intersection upon receipt of a message from CICAS vehicle that the driver has been issued a violation warning or has not responded to a violation warning. Traffic signal adaptation is not envisioned as initial CICAS-V functionality.
- **Traffic signal controller:** Hardware located at the intersection that is responsible for controlling the traffic signal indications displayed on the traffic signal head.
- **Traffic signal controller assembly:** The complete set of components required to monitor and control the traffic signal indications displayed on the traffic signal head including: a traffic signal controller, conflict monitor, and power distribution assembly.
- **Traffic signal controller unit:** That part of a controller assembly that is devoted to the selection and timing of the display of signal indications.
- **Traffic signal indication:** the illumination of a signal lens or equivalent device.
- **Traffic signal head:** A housing that contains light sources, lens, and other components to be used for providing signal indications. A traffic signal head may contain one or more signal faces.
- **Traffic signal face:** the part of the traffic signal provided for controlling one or more traffic movements on a single approach.
- **Traffic signal cycle:** a complete sequence of signal indications.
- **Traffic signal phase:** the green, yellow, and red clearance intervals in cycle that are assigned to an independent traffic movement or combination of movements.
- **Traffic signal timing:** the amount of time allocated for the display of a signal indication.
- **Fixed time signal control:** Traffic signal timing such that the signal phase durations do not change from one cycle to the next. None of the phases function on the basis of actuation. (Also known as pre-timed control.) The fixed time intervals can vary by time of day.

- **Traffic actuated signal control:** Traffic signal timing where the initiation of a change in or an extension of some or all signal phases can be accomplished through any type of detector.

Vehicle Sensors: Sensors on a vehicle installed by the automobile original equipment manufacturer.

Vehicle-to-Vehicle Communication: Communication between vehicles using 5.9 GHz Dedicated Short Range Communications WAVE radios.

Violation: A violation is operationally defined under CICAS-V as crossing the stopping location at a stop sign before stopping or as passing the stopping location on a red light for a signalized intersection. Note that legal definitions may vary by locality.

Wireless Access in Vehicular Environments (WAVE): WAVE standards (IEEE 1609) provide a radio communication component to support the U.S. Department of Transportation's Vehicle Infrastructure Integration Initiative and Intelligent Transportation Systems program. IEEE 1609.3 is part of a standards family to support vehicle-to-vehicle and vehicle-to-roadside communications that will allow motor vehicles to interact with each other and roadside systems to access safety and travel-related information. See DSRC.

U.S. Department of Transportation
ITS Joint Program Office-HOIT
1200 New Jersey Avenue, SE
Washington, DC 20590

Toll-Free "Help Line" 866-367-7487
www.its.dot.gov

FHWA-JPO-10-068



U.S. Department of Transportation
**Research and Innovative Technology
Administration**