

## CLEAR COATS

## ENVIRONMENTAL TECHNOLOGY

EnviroTex Lite® 2032  
POUR-ON HIGH GLOSS FINISH

One thick coat equals up to 50 coats of varnish! A reactive polymer compound, which is solvent free, heat and alcohol resistant. It cures to a thick, glossy coating. Ideal for table and bar tops, decorative surfaces and craft projects. EnviroTex Lite® 2032 Pour-On High Gloss Finish, 32 oz, Clear, High-Gloss, 8 sq-ft/gal Coverage, >200° F Flash

JOBGING	ITEM	SIZE	PK
9701-170	2032	Qt	4
<i>Replaced 9726-030</i>			
9701-171	2128	Gal	2
<i>Replaced 9726-030</i>			




## MOBILE PAINT

MOTHANE MC-63 CLEAR FLOOR  
FINISH MOISTURE CURED  
POLYURETHANE

For industrial, commercial and residential use on wood and concrete floors. For coating properly prepared interior wood and concrete surfaces. Mothane MC-63 Clear Floor Finish offers excellent protection against abrasive traffic and spills in exposures including industrial, marine, and commercial environments. Very pale in color to minimize yellowing. Excellent chemical and abrasion resistance. Hard and flexible with good impact resistance. Lead and Chromate

JOBGING	ITEM	SIZE	PK
63-AF-1-05	14976	5 Gal	1

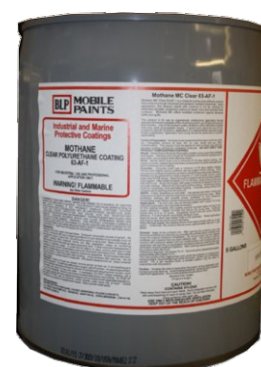

## CONCRETE &amp; DECKS

## ANVIL

ANVIL® GATOR GRIP 9200 SAFE  
STEP

Anvil 9200 Series Gator Grip Safe-Step Coating & Bonding Primer in One has a technologically advanced formula which combines the durability of an epoxy fortified coating and primer in a single component anti-slip coating. The texture finish is 'bare foot' friendly and is easy to keep clean. Anvil Gator Grip Coating and Bonding Primer in One when applied to a properly prepared surface is highly resistant to the effects of hot automobile tires and delivers a solid color slip resistant finish. Anvil Gator Grip is formulated for use on interior and exterior painted or unpainted concrete surfaces such as garage floors, driveways, patios, walkways, decks, basements, shop floors, pool decks and sidewalks. Also, Anvil Gator Grip is formulated to be highly resistant to automotive chemicals, oil, grease and gasoline. Its' durable acrylic/epoxy/primer antislip formula also resists fading, scuffing, cracking, peeling and blistering.

RESIN: Cross-Linking Acrylic/Epoxy

SAFE-STEP ANTI-SKID COATINGS  
& BONDING PRIMER IN ONE

WHITE TINT BASED			
JOBGING	ITEM	SIZE	PK
9748-019	922001	Gal	4
<i>Replaced 9748-016</i>			
9748-020	922005	5 Gal	1
<i>Replaced 9748-015</i>			
ACCENT TINT BASED			
JOBGING	ITEM	SIZE	PK
9748-021	922201	Gal	4
<i>Replaced 9748-014</i>			
9748-022	922205	5 Gal	1
<i>Replaced 9748-11</i>			



# COATINGS

## ANVIL GORILLA GRIP

Waterborne acrylic non-cementitious coating that provides an aggressive texture on surfaces where increased traction is required. Gorilla Grip's unique color adaptation properties perfectly complement Anvil Floor and Driveway Coatings by providing a decorative color match for high traction areas. It is non-flammable, low odor and is environmentally safe. Can be used as a decorative and protective coating on concrete, asphalt, wood, steel on high traction areas such as steps, floors, pool decks, patios, sidewalks, garages, carports, inclined residential driveways, safety ramps, balconies, etc. Gorilla Grip will help prevent weather deterioration of concrete while forming a unique surface texture.

JOBGING	ITEM	SIZE	PK
9748-007	2510	2 Gal	1
9748-008	2540	5 Gal	1



## ANVIL #1750 GRIP-TITE WATERBORNE PRIMER

High Performance Waterborne Grip-Tite Bonding Primer applied directly to clean porous concrete overcomes the problem of improperly prepared surfaces prior to painting or staining. Penetrates into the concrete and improves the adhesion of the topcoat. Forms a surface that improves the workability and durability of the topcoat. Specially formulated bonding primer that can be used to improve the bonding whenever a masonry type coating. Can be used on interior/exterior, painted or unpainted, vertical/horizontal concrete, masonry, stucco, CMU block and porous brick surfaces. Also great for use as a touch up primer where other surface coatings have failed. Do not use on wood, metal, epoxy/urethane or silicone treated surfaces.

JOBGING	ITEM	SIZE	PK
9748-004	17500	Gal	4



## ANVIL #1720 EPOXY SHOW COAT - WHITE TINT BASE CONCRETE & GARAGE FLOOR PAINT

Combines the durability of epoxy coatings with the ease of water cleanup in a single component coating. When applied to a properly prepared surface is highly resistant to the effects of hot automobile tires and delivers a solid color satin finish and can be top coated with Anvil #2350 'Wet Look' Sealer to add a gloss finish to the surface. Formulated for use on interior and exterior painted or unpainted concrete surfaces such as garage floors, driveways, patios, walkways, decks, basements, shop floors, pool decks and sidewalks. Also, formulated to be highly resistant to automotive chemicals, oil, grease and gasoline. Its durable acrylic/epoxy formula also resists fading, scuffing, cracking, peeling and blistering.

JOBGING	ITEM	SIZE	PK
9748-003	17200	Gal	4



## ANVIL #2350 'WET LOOK' SEALER

Combines the extra durability and wet look to stained or uncoated concrete for both interior and exterior applications. Water reducible clear is non-yellowing and is low odor. When applied to a properly prepared surface is highly resistant to the effects of hot automobile tires. Anvil #2350 'Wet Look' Sealer is formulated for use on surfaces such as driveways, garage floors, patios, walkways, sidewalks, decks, pavers, un-glazed tile, brick and stucco. This product is milky white when applied, but dries to a natural super clear gloss finish. 'Wet Look' Sealer is not intended for use over wood, metal, granite, terrazzo, marble surfaces or other natural stone products.

JOBGING	ITEM	SIZE	PK
9748-006	2350	Gal	4



## SEAL KRETE

### SEAL KRETE WATERPROOFING SEALER

Most versatile sealer available. Ideal for protecting, priming or revitalizing virtually any vertical surface. Seals and protects concrete and masonry from water damage, binds chalky surfaces, primes and improves paint adhesion, strengthens mortar joints. Rejuvenates old paint, siding, stucco and masonry. Improves paint spread rate, coverage and adhesion. SCAQMD approved.

JOBGING	ITEM	SIZE	PK
9720-001	100001	1 Gal	4
9720-002	100005	5 Gal.	1



## ZINSSER

### Rust-Oleum Tint Base Restore 10X High Build Deck & Concrete Resurfacer

10x thicker than ordinary deck coatings. Fills cracks, locks down splinters and hides imperfections. Tintable. Covers 40 square feet. Needs two coats.

JOBGING	ITEM	SIZE	PK
9992-323	287328	Gal	1
9992-322	287327	4 Gal	1



### Rust-Oleum Tint Base Restore 4X Deck Coat

Restore® 4X Deck Coat, Liquid, Tint Base, 1 gal, Composition: Wollastonite, Mica, Coverage: 80 sq-ft/gal, Curing Time: 3 hr to Recoat, >200 deg F Flash Point, 40 g/L VOC, 1.388 Specific Gravity, Mild Odor, Applicable Materials: Wood and Concrete. Restore® 4X 41100 Deck Coat, 1 gal, Tint Base, 80 sq-ft/gal Coverage, >200°F Flash, Mild Odor

JOBGING	ITEM	SIZE	PK
9992-325	41100	Gal	1
9992-324	41500	5 Gal	1



### RESTORE ROLLER COVER

- 4 roller for precise, single-board applications
- Designed specifically for deck and concrete Restore
- Disperses the product evenly across the surface leaving a uniform non slip surface

JOBGING	ITEM	SIZE	PK
9992-316	20114	4"	6
9992-318	RRC-9-2009	9"	6





## COATINGS

## GALVANIZING COMPOUND

## ZINSSER/RUST-OLEUM

## 7000 SYSTEM COLD GALVANIZING COMPOUND

- Self Priming & Excellent adhesion to galvanized metal.
  - Two year rust-proof guarantee-maximum corrosion protection.
  - Protects and Repairs Bare sheet metal, galvanized ducts, storage tanks, etc.
  - Meets Federal Specifications DOD-P-21035A; MIL-P-26915C
  - Meets USDA requirements for incidental food contact accepted for use in federally registered Canadian food facilities.
  - Ideal for use in mild industrial environments.
- Instantly galvanize metal surfaces or repair worn or damaged galvanized steel with Rust-Oleum High Performance 7000 System Cold Galvanizing Compound. The coating contains 95% pure zinc in the dry film - for maximum corrosion resistance.

JOBGING	ITEM	DESC	SIZE	PK
9992-500	206193	Cold Galvanizing	Gal	2
9992-501	206194	Cold Galvanizing	Qt	2



## 1600 SYSTEM GALVANIZING COMPOUND SPRAY

- Touch-Up and repair galvanized ducts, storage tanks, fences, gutters, etc.
- Dries Fast - 20 minutes to touch, withstands 200°F.
- Performance offset to Federal Specifications DOD-P-21035A; MIL-P-26915C
- Meets USDA requirements for incidental food contact

Touch up galvanized surfaces with Rust-Oleum® Industrial Choice® 1600 System Galvanizing Compound Spray. This 93% pure zinc coating provides maximum corrosion resistance and excellent adhesion and durability on galvanized metal.

JOBGING	ITEM	DESC	SIZE	PK
9992-480	1685830	Cold Galvanizing	14 oz	6
9992-481	244305	Bright Galvanizing	14 oz	6



## ZINSSER/RUST-OLEUM

## B-I-N® SHELLAC BASE PRIMER

- Shellac-base primer-sealer
- For interior and spot exterior use
- Greatest stain sealer
- Seals knots and sap streaks
- Seals pet, smoke and musty odors
- Sticks to all surfaces without sanding
- Lightning fast dry - recoat in 45 minutes

## PRIMERS

JOBGING	ITEM	SIZE	DESC	PK
9992-011	00904	Qt	White	6
9992-010	00901	Gal	White	4
9870-030	01008	13 oz Spray	White	6



## BULLS EYE® WATER BASE PRIMER &amp; SEALER INTERIOR ONLY

- Dries fast & dead flat
- Sands easily after just 1 hour
- Ultra low odor for interior work
- Great adhesion without sanding
- Easy soap & water clean up

JOBGING	ITEM	SIZE	PK
9992-078	02241	Gal	4
9992-079	02240	5 Gal	1



## COVER STAIN® OIL BASE PRIMER INTERIOR/EXTERIOR

- Blocks cedar & redwood bleed
- Use for fire, smoke & water damage
- Sticks to all surfaces without sanding
- Fast drying - recoat in 2 hours

JOBGING	ITEM	SIZE	DESC	PK
9992-015	03504	Qt	White	6
9992-014	03501	Gal	White	4
9992-086	03500	5 Gal	White	1
9992-080	03608	13 oz Spray	White	12



## ZINSSER® MOLD KILLING PRIMER

- Paint directly over mold
- Kills existing mold, mildew, and odor causing bacteria
- Binds chalky siding, masonry, and metal
- EPA Registered
- Interior/Exterior
- Water-Based

JOBGING	ITEM	SIZE	PK
9992-095	276049	Gal	2
9992-096	276088	5 Gal	1



## ZINSSER® BULLS EYE 1-2-3® WATER BASE PRIMER SEALER

- Water-base primer-sealer
- Interior and exterior
- Sticks to all surfaces without sanding
- Seals stains, graffiti and tannin bleed
- Mold & mildew resistant film
- Rust inhibitive – great for new metal
- Fast 1 hour dry time

JOBGING	ITEM	SIZE	DESC	PK
9992-013	02004	Qt	White	6
9992-012	02001	Gal	White	4
9992-031	02000	5 Gal	White	1



## SMART PRIME® PRIMER

- Oil-base performance in an advanced water-base formula
- Primer for all projects
- Sticks to all surfaces - interior and exterior
- Blocks all stains, including water stains
- Low-VOC, low odor formul

JOBGING	ITEM	SIZE	PK
9992-091	249729	Gal	2



## PEEL STOP® CLEAR BINDING SEALER

- Interior & exterior water-base
- Extend the life of problem surfaces
- Binds cracking, chalking and peeling paint
- Glues down cracks and gaps under edges of old paint

JOBGING	ITEM	SIZE	PK
9992-029	60001	Gal	4



## COATINGS

### PEEL BOND XIM HIGH BUILD WATER BASED BONDING PRIMER/SEALER

- Clear high build, water based strong bonding primer, sealer and filler
- Use with Latex topcoats
- Penetrates Acrylic Latex and elastomeric paints, bonds to old paint, wood, ply wood, T1-11, PVC, Aluminum, Galvanized Metal, Brick and Stucco
- LEED Compliance
- Provides a thick wet film build on both horizontal and vertical surfaces without sagging or slipping

JOBGING	ITEM	SIZE	PK
9992-099	11461	Gal	2



### BULLS EYE® HIGH HIDE ODORLESS PRIMER

- Interior primer-sealer and stain killer
- High-solids, low VOC specialty primer
- Performance of oil-base without the odor
- Kills water-graffiti-ink & crayon stains
- Sticks to all surfaces without sanding
- Non-yellowing, dries flat and sands easily
- VOC compliant sprayable formula
- Dries in just 30 minutes - recoat in 2 hours

JOBGING	ITEM	SIZE	PK
9992-083	03951	Gal	4



### ZINSSER® WATERBORNE DRYFALL

Zinsser 5 gal. Waterborne Dry Fall Coating is a high-hiding interior flat acrylic coating for use over prepared ceilings and walls of commercial or industrial buildings. Formulated to provide a uniform finish on a variety of industrial construction materials with minimum overspray. Any overspray quickly dries to a dust-like finish for quick and easy cleanup. Use as a finish coat or as a primer prior to application of an oil or water based top coat

JOBGING	ITEM	COLOR	SIZE	PK
9992-100	293233	BLACK	5 Gal	1
9992-101	293234	WHITE	5 Gal	1



## ROOF COATINGS

### ANVIL

#### ROOF-TEC® ACRYLIC ELASTOMERIC ROOF COATING

Anvil's ROOF-TEC Acrylic Elastomeric Roof Coating is an acrylic latex roof coating formulated to provide superior bridging of the coating over seams and small separations. ROOF-TEC Acrylic exceeds performance of similar coatings of this type for adhesion and longevity. Its brilliant white finish not only beautifies, it reflects up to 90% of the sun's rays lowering heat buildup and reducing air conditioning costs. Stays brighter longer since it contains a fungicide to resist mildew growth on the product film. Do not use on flat roofs. Roofs must have an adequate pitch to allow water to run off. 10 Year Warranty

JOBGING	ITEM	SIZE	PK
9748-030	6600	5 Gal	1



#### ROOF-TEC® ELASTOMERIC SMOOTH BRUSH GRADE CAULK

Anvil's #1220 ROOF-TEC Elastomeric Smooth Brush Grade Caulk is a heavy bodied, flexible, elastomeric patching material for filling and patching cracks joints and seams on: masonry, stucco, concrete block, brick stone, marble, wood, metal and glass prior to applying finish. This product provides excellent adhesion, long life and is resistant to failure by expansion, contraction, or other joint movement. Fast drying and may be painted with latex or oil base paints. For use on interior or exterior surfaces.

JOBGING	ITEM	SIZE	PK
9748-033	1220	Gal	4





**ROOF-TEC® SEAM SEALING MEMBRANE**


Anvil's #9414 ROOF-TEC Seam Sealing Membrane is supplied in 100 foot rolls in widths of 4" and is designed to be used as a reinforcing material when sealing seams on roofs, flashing and around to be used as a reinforcing material when sealing seams on roofs, flashing and around protrusions when using Anvil caulking products. ROOF-TEC Polyester Membrane is more flexible than fiberglass mesh and produces a strong resilient joint and bonding system.

JOBGING	ITEM	SIZE	PK
9748-034	9414	4" x 100'	14

**GEMINI****STAINS****TOTAL WOOD PRESERVATIVE 100 SERIES**

TWP 100 series is an EPA registered wood preservative which prevents structural damage and wood decay on exterior above ground wood surfaces such as untreated or previously treated fencing, decking, wood siding, log homes, and roofing. It resists water absorption that causes warping, cracking and splitting as well as preventing freeze damage in colder climates. TWP 100 Series contains special U.V. absorbing pigments that prevent unsightly wood graying, darkening, and fading. The selected mildewcides inhibit the growth of mold and mildew, which assist in preventing premature discoloration.

JOBGING	ITEM	SIZE	DESC	PK
9736-300	TWP-100-1	Gal	Clear	4
9736-301	TWP-100-5	5 Gal	Clear	1
9736-302	TWP-101-1	Gal	Cedartone	4
9736-303	TWP-101-5	5 Gal	Cedartone	1
9736-304	TWP-102-1	Gal	Redwood	4
9736-306	TWP-103-1	Gal	Dark Oak	4
9736-307	TWP-103-5	5 Gal	Dark Oak	1
9736-308	TWP-105-1	Gal	Cape Cod Gray	4
9736-310	TWP-106-1	Gal	Prairie Gray	4
9736-312	TWP-115-1	Gal	Honeytone	4
9736-314	TWP-116-1	Gal	Rustic	4
9736-315	TWP-116-5	5 Gal	Rustic	1
9736-316	TWP-120-1	Gal	Pecan	4

**WATER PROOFING & WOOD PRESERVATIVES****GREEN PRODUCTS****COPPER GREEN WOOD PRESERVATIVE**

Copper Green Wood Preservatives eliminates all hazards of wood-eating insects and termites and it works equally well against mold, mildew, lichens, moss, and rot. When color is not an issue, copper products are the best and the most effective solution. When applying the preservative around plants, it's best to cover the plants for complete protection. However, when the preservatives dry, they are perfectly safe to use on planter boxes and greenhouses.

JOBGING	ITEM	SIZE	PK
7400-001	30001	Gal	4

**ZINSSER****WATERTITE™ MOLD & MILDEWPROOF™ WATERPROOFING PAINT**

- Great for basements and other interior/exterior concrete above and below grade masonry surfaces
- LIFETIME WATERPROOF GUARANTEE
- Guaranteed to stop up to 34 psi - twice the strength of latex waterproofer
- Prevents the growth of mold & mildew on the paint film for 5 years - guaranteed!
- Smooth, non-gritty finish applies easily to wet or dry walls
- Ultra low odor oil-base formula has less odor than latex paint

JOBGING	ITEM	SIZE	DESC	PK
9992-067	05001	Gal	White	2



251.443.6110

251.408.0410 Fax

Toll Free 1.800.621.6952

(In Alabama) 1.800.672.6707

## COATINGS

## INTERIOR STAINS

## OLD MASTERS

## WIPING STAIN

Old Masters® Wiping Stain is a robust, interior oil-based masking stain for use on wood, fiber glass, metal and composition surfaces. This stain can also be used in wood graining or as an antiquing glaze over painted surfaces. Its thick, rich formula allows easy application and superior color control, necessary to achieve rich, uniform color on most surfaces in a single application. Wiping Stain comes in 21 factory-mixed colors and can also be intermixed or tinted to achieve custom colors. This product is intended for interior use only

Craftsman quality, oil wiping stain

For better color control on interior surfaces

Semi-transparent for all interior wood surfaces

Easy to use

Thick, rich and forgiving

All-purpose stain for decorative finishes

Application: Interior Use

JOBGING	ITEM	SIZE	DESC.	PK
9701-300	11301	Gal	Cherry	2
9701-301	11401	Gal	Red Mahog.	2
9701-302	11501	Gal	Provincial	2
9701-303	11701	Gal	Early Amer.	2
9701-304	11801	Gal	Dk. Mahog.	2
9701-305	11901	Gal	Cedar	2
9701-306	12001	Gal	Dk. Walnut	2
9701-307	12201	Gal	Span. Oak	2
9701-308	13001	Gal	Amer. Walnut	2
9701-309	15001	Gal	Rich Mahog.	2
9701-310	15201	Gal	Espresso	2



JOBGING	ITEM	SIZE	DESC.	PK
9701-311	11304	Qt	Cherry	4
9701-312	11404	Qt	Red Mahog.	4
9701-313	11504	Qt	Provincial	4
9701-314	11704	Qt	Early Amer.	4
9701-315	11804	Qt	Dk. Mahog.	4
9701-316	11904	Qt	Cedar	4
9701-317	12004	Qt	Dk. Walnut	4
9701-318	12204	Qt	Span. Oak	4
9701-319	13004	Qt	Amer. Walnut	4
9701-320	15004	Qt	Rich Mahog.	4
9701-321	15204	Qt	Espresso	4



## INTERIOR/EXTERIOR GEL STAINS

## GEL STAIN

Old Masters® Gel Stain is a highly pigmented, oil-based stain designed to achieve intense colors on interior and exterior wood, fiberglass, metal and composition surfaces. Its thick formula allows easy application and superior color control, necessary to achieve a rich and uniform color on most surfaces in a single application. Ideal for difficult-to-stain woods such as pine, poplar, maple, plywood and veneers, as well as nonporous surfaces including metal, composition (Masonite), interior and exterior fiberglass doors and plastic moldings. Gel Stain comes in 21 factory mixed colors and can also be intermixed or tinted to achieve custom colors

A highly pigmented gelled stain

Easy application and better color control

Great for hard-to-stain wood

Works on pine, plywood and veneers

Clean up with mineral spirits or paint thinner

Application: Interior/Exterior Use

JOBGING	ITEM	SIZE	DESC.	PK
9701-400	80304	Qt	Cherry	4
9701-401	80404	Qt	Red Mahog.	4
9701-402	80504	Qt	Provincial	4
9701-403	80604	Qt	Early Amer.	4
9701-404	80704	Qt	Dk. Walnut.	4
9701-405	81104	Qt	Dk. Mahog.	4
9701-406	81304	Qt	Cedar	4
9701-407	81404	Qt	Span. Oak	4
9701-408	81804	Qt	Amer. Walnut	4
9701-409	84304	Qt	Rich Mahog.	4
9701-410	84404	Qt	Espresso	4



JOBGING	ITEM	SIZE	DESC.	PK
9701-411	80308	Pt	Cherry	4
9701-412	80408	Pt	Red Mahog.	4
9701-413	80508	Pt	Provincial	4
9701-414	80608	Pt	Early Amer.	4
9701-415	80708	Pt	Dk. Walnut.	4
9701-416	81108	Pt	Dk. Mahog.	4
9701-417	81308	Pt	Cedar	4
9701-418	81408	Pt	Span. Oak	4
9701-419	81808	Pt	Amer. Walnut	4
9701-420	84308	Pt	Rich Mahog.	4
9701-421	84408	Pt	Espresso	4

